

**IN THE UNITED STATES DISTRICT COURT  
FOR THE DISTRICT OF DELAWARE**

INOVIS USA, INC.,	)	
	)	
Plaintiff,	)	
v.	)	
	)	C.A. No. 07-459-GMS
CLASSIFIED INFORMATION, INC.,	)	
	)	
Defendants.	)	
	)	JURY TRIAL DEMANDED
	)	
	)	
	)	

**ANSWER TO AMENDED COMPLAINT,  
COUNTERCLAIM AND DEMAND FOR JURY TRIAL**

Defendant Classified Information, Inc. (“Classified”) responds as follows to the First Amended Complaint of Plaintiff Inovis USA, Inc. (“Inovis”).

**PARTIES**

1. Classified admits the allegations of ¶ 1.
2. Classified admits the allegations of ¶ 2.
3. Classified admits the allegations of ¶ 3.

**JURISDICTION AND VENUE**

4. Classified admits that Plaintiff purports to bring claims under the Declaratory Judgment Act, 28 U.S.C. §§ 2201 and 2202, and the United States Patent Laws, 35 U.S.C. § 101 *et seq.*, seeking declaratory relief of non-infringement, invalidity and/or unenforceability of U.S. Patent No. 5,812,669 (the “’669 Patent”). Classified denies that Inovis is entitled to such relief. Classified also admits that Plaintiff purports to bring claims for violations of the Lanham Act and state tort law, but denies that Inovis is entitled to relief under such claims. Classified admits that the Court has subject matter jurisdiction of this action.

5. Classified admits that Inovis seeks a declaration that Inovis has not infringed any valid claims of the '669 Patent and/or that the '669 Patent is invalid and/or unenforceable, as well as relief under the federal and state laws that prohibit unfair business practices and unfair competition. Classified denies that Inovis is entitled to any such relief.

6. Classified admits the allegations of ¶ 6.

7. Classified admits the allegations of ¶ 7.

8. Classified admits the allegations of ¶ 8.

### **BACKGROUND**

9. Classified admits that Inovis sells products that allow business-to-business commerce and secure electronic data interchange over the Internet. Classified is without personal knowledge sufficient to admit or deny the remaining allegations of ¶ 9 and for that reason they are denied.

10. Classified admits that Inovis sells a product known as "BizManager." Classified is without personal knowledge sufficient to admit or deny the remaining allegations of ¶ 10 and for that reason they are denied.

11. Classified admits that Inovis' product BizManager allows the secure exchange of data between Inovis' computer systems and the computer systems of its customers or business partners over the Internet. Classified is without personal knowledge sufficient to admit or deny the remaining allegations of ¶ 11 and for that reason they are denied.

12. On information and belief, Classified admits that BizManager allows the secure exchange of data between Inovis' customers. Classified is without personal knowledge sufficient to admit or deny the remaining allegations of ¶ 12 and for that reason they are denied.

13. Classified admits the allegations of ¶ 13.

14. Classified is without personal knowledge sufficient to admit or deny the allegations of ¶ 14 and for that reason they are denied.

**THE 669 PATENT**

15. Classified admits the allegations of ¶ 15.

16. Classified admits the allegations of ¶ 16.

**CI'S ENFORCEMENT CAMPAIGN OF THE 669 PATENT AGAINST INOVIS  
AND INOVIS' CUSTOMERS**

17. On information and belief, Classified admits that Bumble Bee Foods, Morgan Foods, Inc. and Aspen Pet Products are customers of Inovis. Classified is without personal knowledge sufficient to admit or deny the remaining allegations of ¶ 17 and for that reason they are denied.

18. Classified admits that it contacted Bumble Bee Foods, Morgan Foods, Inc. and Aspen Pet Products alleging that Classified owns and has the right to enforce the '669 Patent and, that by using BizManager, Bumble Bee Foods, Morgan Foods, Inc. and Aspen Pet Products infringe the '669 Patent. Classified denies the remaining allegations of ¶ 18.

19. Classified admits the allegations of ¶ 19.

20. Classified denies the allegations of ¶ 20.

21. Classified denies the allegations of ¶ 21.

22. Classified denies the allegations of ¶ 22.

23. Classified admits the allegations of ¶ 23.

24. Classified denies that the Assignment of Patent Rights to DD is valid and further denies the remaining allegations of ¶ 24.

25. Classified is without personal knowledge sufficient to admit or deny the allegations of ¶ 25 and for that reason they are denied.

26. Classified is without personal knowledge sufficient to admit or deny the allegations of ¶ 26 and for that reason they are denied.

27. Classified is without personal knowledge sufficient to admit or deny the allegations of ¶ 27 and for that reason they are denied.

28. Classified is without personal knowledge sufficient to admit or deny the allegations of ¶ 28 and for that reason they are denied.

29. Classified is without personal knowledge sufficient to admit or deny the allegations of ¶ 29 and for that reason they are denied.

30. Classified admits that a dispute exists between Classified and Inovis. Classified denies the remaining allegations of ¶ 30.

31. Classified admits that a controversy exists between itself and Inovis. Classified denies that Inovis is entitled to relief. Classified also denies the remaining allegations of ¶ 31.

32. Classified admits the allegations of ¶ 32.

33. Classified admits that Inovis must cease making, using and selling its Bizmanager products or risk actual and treble damages in an infringement suit against Inovis. The remaining allegations of ¶ 33 are denied.

### **COUNT I**

#### **DECLARATORY JUDGMENT COUNT: AGAINST CI AND DD**

#### **(NONINFRINGEMENT, INVALIDITY AND/OR UNFORCEABILITY OF THE 669 PATENT)**

34. Classified restates and realleges its answers set forth in paragraphs 1 through 33 above and incorporates them by reference.

35. Classified denies the allegations of ¶ 35.

36. Classified denies the allegations of ¶ 36.

37. Classified denies the allegations of ¶ 37.

38. Classified denies the allegations of ¶ 38.

**COUNT II: AGAINST CI**

**UNFAIR COMPETITION: VIOLATION OF SECTION 43 OF THE LANHAM  
ACT**

39. Classified restates and realleges its answers set forth in paragraphs 1 through 38 above and incorporates them by reference.

40. Classified denies the allegations of ¶ 40.

41. Classified denies the allegations of ¶ 41.

42. Classified denies the allegations of ¶ 42.

43. Classified denies the allegations of ¶ 43.

**COUNT III: AGAINST CI**

**TORTIOUS INTERFERENCE WITH BUSINESS RELATIONSHIPS**

44. Classified restates and realleges its answers set forth in paragraphs 1 through 43 above and incorporates them by reference.

45. Classified denies the allegations of ¶ 45.

46. Classified denies the allegations of ¶ 46.

47. Classified denies the allegations of ¶ 47.

48. Classified denies the allegations of ¶ 48.

49. Classified denies the allegations of ¶ 49.

50. Classified denies the allegations of ¶ 50.

51. Classified denies the allegations of ¶ 51.

**AFFIRMATIVE DEFENSES**

In further answer to Inovis' First Amended Complaint, Classified hereby pleads and affirmatively sets forth the following defenses:

**FIRST AFFIRMATIVE DEFENSE**

52. Classified has a right to enforce the '669 Patent against any entity making, using, selling or offering to sell infringing products or services in the United

States. Inovis, as well as certain of its customers, make, use, sell or offer for sale an infringing product or service. Classified's enforcement campaign merely sought to prevent Inovis' continued infringement, contributory infringement, and inducement to infringe the '669 Patent and has not unlawfully or improperly interfered with Invois' business relationships.

53. Classified had and continues to have a good faith belief that Inovis, as well as certain of Inovis' customers, infringe, contribute to infringe, or induce others to infringe the '669 Patent.

54. Classified has not knowingly or recklessly made any false statements with regard to Inovis or its customers.

### **SECOND AFFIRMATIVE DEFENSE**

55. Inovis is precluded from recovery, in whole or in part, because it has failed to properly or adequately mitigate its damages.

### **THIRD AFFIRMATIVE DEFENSE**

56. Any damages suffered by Inovis are the result of its infringement, contribution of infringement, and inducement of infringement of Classified's patent, and accordingly, Inovis is not entitled to recover damages from Classified.

### **PRAYER FOR RELIEF**

1. Classified admits that Inovis purports to seek a judgment and declaration that neither Inovis nor any of its customers have infringed and do infringe in any manner any claim of the 669 Patent, directly, contributorily or by inducement, and have not otherwise infringed or violated any rights of Classified. Classified denies that Inovis is entitled to any such relief.

2. Classified admits that Inovis purports to seek a judgment that each claim of the 669 Patent is invalid and unenforceable. Classified denies that Inovis is entitled to any such relief.

3. Classified admits that Inovis purports to seek an injunction against Classified seeking to prevent Classified from asserting the '669 Patent against Inovis and certain of its customers. Classified denies that Inovis is entitled to any such relief.

4. Classified admits that Inovis purports to seek an injunction against Classified seeking to prevent Classified from interfering with Inovis business. Classified denies that Inovis is entitled to any such relief.

5. Classified admits that Inovis purports to seek an award of damages to compensate Inovis for damages allegedly suffered as a result of Classified's actions. Classified denies that Inovis is entitled to any such relief.

6. Classified admits that Inovis purports to seek an award of treble damages to Inovis pursuant to 15 U.S.C. § 1117(a). Classified denies that Inovis is entitled to any such relief.

7. Classified admits that Inovis purports to seek an award of punitive damages to Inovis. Classified denies that Inovis is entitled to any such relief.

8. Classified admits that Inovis purports to seek a judgment and declaration that this is an exceptional case within the meaning of 35 U.S.C. § 285. Classified denies that Inovis is entitled to any such relief.

9. Classified admits that Inovis purports to seek a judgment for "such other and further relief in law or in equity as this Court deems just or proper." Classified denies that Inovis is entitled to any relief whatsoever in connection with this action.

In further answer to Inovis' First Amended Complaint in this action, Classified denies each and every allegation contained in Inovis' First Amended Complaint directed to Classified that was not specifically admitted, denied or otherwise responded to in this Answer and Counterclaims.

**COUNTERCLAIM AND DEMAND FOR JURY TRIAL**

CLASSIFIED INFORMATION, INC. (“Classified”), by and through its undersigned counsel, for their claims for relief against INOVIS USA, INC. (“Inovis”), allege as follows:

**JURISDICTION AND VENUE**

1. This is a counterclaim for patent infringement arising under the United States Patent Act, 35 U.S.C. §§ 100 *et seq.*, including §§ 271 and 281.
2. This Court has subject matter jurisdiction over this counterclaim under 28 U.S.C. §§ 1331 and 1338(a).
3. Venue is proper in this judicial district under 28 U.S.C. §§ 1391(c) and 1400(b).

**THE PARTIES**

4. Classified is a Delaware corporation with its principal place of business in San Marcos, CA.
5. Inovis is Delaware corporation with its principal place of business in Alpharetta, GA.

**PATENT IN SUIT**

6. United States Patent No. 5,812,669 (the “’669 patent”), entitled “Method And System For Providing Secure EDI Over An Open Network,” was duly and legally issued on September 22, 1998. A true and correct copy of the ‘669 Patent is attached as Exhibit A.
7. Classified is the assignee and sole owner of all right, title and interest in, and to the ‘669 patent.

**BACKGROUND**

8. Classified, through its predecessors in interest, is a recognized innovator in the area of EDI over the internet. In fact, Classified’s Templar software, released in May of 1995, was the first commercially available software product to offer businesses secure

EDI over the Internet. Inovis' BizManager software was not released by Inovis until August of 2005, over 8 years after Templar, and 7 years after the issuance of the '669 Patent.

9. Classified continues to sell its flagship product – Templar. Classified has lost and continues to lose sales as a result of Inovis' infringement.

10. Classified and Inovis are direct competitors. More specifically, Inovis' infringing BizManager products and related services directly compete with Classified's Templar product.

### **PATENT INFRINGEMENT BY INOVIS**

11. Classified incorporates herein by this reference paragraphs 1 through 10 of its Counterclaim as if set forth in full.

12. Inovis has infringed and continues to infringe the '669 Patent by its manufacture, testing, use, sale and/or offer to sell Inovis' BizManager product, and other products and services related to providing secure EDI transmissions over the Internet. In addition Inovis actively contributes and induces others to infringe the '669 Patent through its sales, offers to sell, and support of BizManager and other products and services related to providing secure EDI transmissions over the Internet. Inovis is liable for its infringement, contributory infringement, and inducement to infringe the '669 Patent pursuant to 35 U.S.C. § 271.

13. Inovis' acts of infringement are irreparably harming and causing damage to Classified.

14. Inovis will continue to infringe, contribute to, or induce others to infringe the '669 Patent unless enjoined.

15. Inovis' conduct is willful and deliberate. On information and belief, Inovis had full knowledge of the '669 Patent since its formation in 2002. With full knowledge that it did not have any rights under the '669 Patent, Inovis made, used, sold

and offered for sale products and services that infringed, contributed to infringe, or induced others to infringe the '669 Patent.

16. As a result of Inovis' willful and deliberate misconduct, Classified seeks an enhancement of its damages pursuant to 35 U.S.C. § 284.

#### **PRAYER FOR RELIEF**

A. Classified seeks a judgment that Inovis has infringed United States Patent No. 5,812,669 and that its infringement is willful.

B. Classified seeks a judgment that Inovis has contributed to infringe, and induced others to infringe United States Patent No. 5,812,669 and that its conduct is willful.

C. Classified seeks an order permanently enjoining Inovis and its officers, agents, employees, and those acting in privity with it, from further infringement, contributory infringement, and inducement of infringement of U.S. Patent No. 5,812,669.

D. Classified seeks an award of damages arising out of Inovis' infringement, contributory infringement, and inducement of infringement of United States Patent No. 5,812,669, including enhanced damages pursuant to 35 U.S.C. § 284, together with prejudgment and post-judgment interest, in an amount according to proof.

E. Classified seeks an award of its attorney fees, costs, and expenses pursuant to 35 U.S.C. § 285 or as otherwise permitted by law.

F. Classified seeks such other and further relief as the Court may deem just and proper.

#### **DEMAND FOR JURY TRIAL**

Classified hereby respectfully requests a trial by jury on any and all issues in its answer or counterclaim triable of right by a jury.

ASHBY & GEDDES

*/s/ Tiffany Geyer Lydon*

---

Steven J. Balick (I.D. #2114)  
John G. Day (I.D. #2403)  
Tiffany Geyer Lydon (I.D. #3950)  
500 Delaware Avenue, 8th Floor  
P.O. Box 1150  
Wilmington, DE 19899  
(302) 654-1888  
sbalick@ashby-geddes.com  
jday@ashby-geddes.com  
tlydon@ashby-geddes.com

*Attorneys for Defendant/Counter-  
Plaintiff Classified Information, Inc.*

*Of Counsel:*

Michael A. Lee  
Vineet Bhatia  
Stephen F. Schlather  
SUSMAN GODFREY L.L.P.  
1000 Louisiana, Suite 5100  
Houston, Texas 77002  
(713) 651-9366

Dated: February 19, 2008  
188370.1

# **EXHIBIT A**



US005812669A

United States Patent [19]

Patent Number: 5,812,669

Jenkins et al.

Date of Patent: Sep. 22, 1998

[54] **METHOD AND SYSTEM FOR PROVIDING SECURE EDI OVER AN OPEN NETWORK**

[76] Inventors: **Lew Jenkins**, 819 Slater Ave., Pleasant Hill, Calif. 94523; **Emmanuel K. Pasetes, Jr.**, 55 Woodranch Cir., Danville, Calif. 94525

[21] Appl. No.: **503,984**

[22] Filed: **Jul. 19, 1995**

[51] **Int. Cl.<sup>6</sup>** ..... **H04L 9/00**; H04L 9/30; H04L 9/32

[52] **U.S. Cl.** ..... **380/25**; 380/21; 380/23; 380/30; 380/49

[58] **Field of Search** ..... 380/9, 21, 23, 380/25, 30, 44, 46, 49, 50

5,199,074 3/1993 Thor .  
5,202,977 4/1993 Pasetes, Jr. et al. .  
5,204,961 4/1993 Barlow .  
5,208,858 5/1993 Vollert et al. .  
5,214,702 5/1993 Fischer .  
5,222,140 6/1993 Beller et al. .  
5,224,166 6/1993 Hartman, Jr. .  
5,226,709 7/1993 Labrache .  
5,237,611 8/1993 Rasmussen et al. .  
5,253,294 10/1993 Maurer .  
5,261,002 11/1993 Perlman et al. .

(List continued on next page.)


Primary Examiner—Bernarr E. Gregory  
Attorney, Agent, or Firm—Bryan Cave LLP

[57] **ABSTRACT**

A method and system for selectively interconnecting a plurality of computers (112,114) over an open public network (120,102,122), such as the INTERNET, provides a private secure computer exchange of EDI interchange communications between a sender computer (112) and a recipient computer (114), each of which has an associated public key and an associated private key, such as in an RSA type cryptographic communication system (100). The associated EDI acknowledgement message, such as the AUTACK, is used to provide secure authentication and non-repudiation of both origin and receipt of the secure private EDI interchange communications transmitted over the open public network (120,102,122) with the AUTACK transmitted from the sender computer (112) being digitally signed with the sender's private key, and with the reply AUTACK transmitted from the recipient computer (114) being digitally signed with the recipient's private key. The respective digitally signed AUTACKs are decrypted after receipt by using the public key associated with the private key used to provide the digital signature. The transmitted AUTACK from the sender computer (112) includes an MD5 for the entire EDI interchange as well as an MD5 of the AUTACK, with the AUTACK, thus, being used to provide the digital signature. The reply AUTACK from the recipient computer (114) includes an MD5 of the reply AUTACK. The ability to conduct business over the network (120,102,122) is controlled by private trading partner agreement communications which provide key certification.

50 Claims, 43 Drawing Sheets

[56]	References Cited	
	U.S. PATENT DOCUMENTS	
	4,200,770	4/1980 Hellman et al. .
	4,218,582	8/1980 Hellman et al. .
	4,267,782	5/1981 Talbott .
	4,405,829	9/1983 Rivest et al. .
	4,424,414	1/1984 Hellman et al. .
	4,471,164	9/1984 Henry .
	4,578,531	3/1986 Everhart et al. .
	4,625,076	11/1986 Okamoto et al. .
	4,723,284	2/1988 Munck et al. .
	4,823,388	4/1989 Mizutani et al. .
	4,868,877	9/1989 Fischer .
	4,876,716	10/1989 Okamoto .
	4,885,777	12/1989 Takaragi et al. .
	4,893,338	1/1990 Pastor .
	4,987,593	1/1991 Chaum .
	4,991,210	2/1991 Chaum .
	5,001,752	3/1991 Fischer .
	5,005,200	4/1991 Fischer .
	5,018,196	5/1991 Takaragi .
	5,022,080	6/1991 Durst et al. .
	5,073,934	12/1991 Matyas et al. .
	5,073,935	12/1991 Pastor .
	5,136,643	8/1992 Fischer .
	5,136,646	8/1992 Haber et al. .
	5,142,577	8/1992 Pastor .
	5,142,578	8/1992 Matyas et al. .

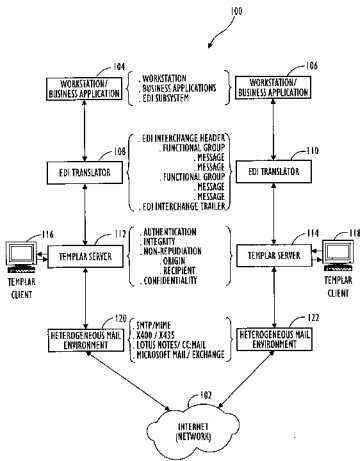

5,812,669

Page 2

---

U.S. PATENT DOCUMENTS

5,268,962	12/1993	Abadi et al. .	5,351,293	9/1994	Michener et al. .	
5,297,208	3/1994	Schlaflly et al. .	5,351,302	9/1994	Leighton et al. .	
5,299,263	3/1994	Beller et al. .	5,367,573	11/1994	Quimby .	
5,303,303	4/1994	White .	5,369,702	11/1994	Shanton .	
5,311,591	5/1994	Fischer .	5,369,705	11/1994	Bird et al. .	
5,337,360	8/1994	Fischer .	5,373,558	12/1994	Chaum .	
5,339,361	8/1994	Schwalm et al. .	5,375,169	12/1994	Scheidt et al. .	
			5,390,247	2/1995	Fischer .....	380/25

U.S. Patent

Sep. 22, 1998

Sheet 1 of 43

5,812,669

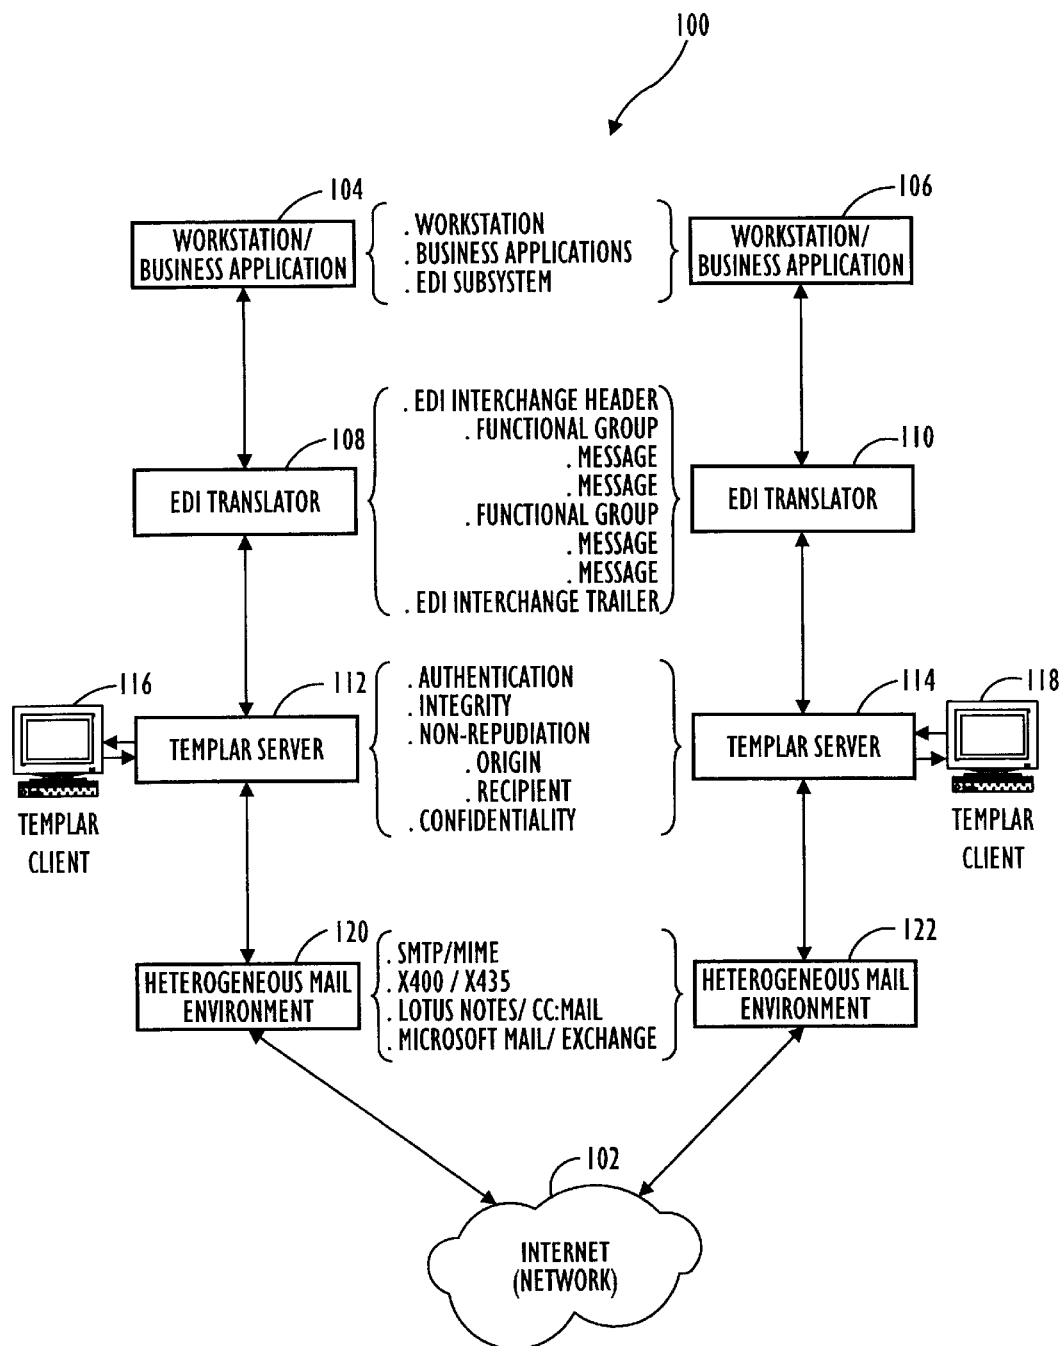
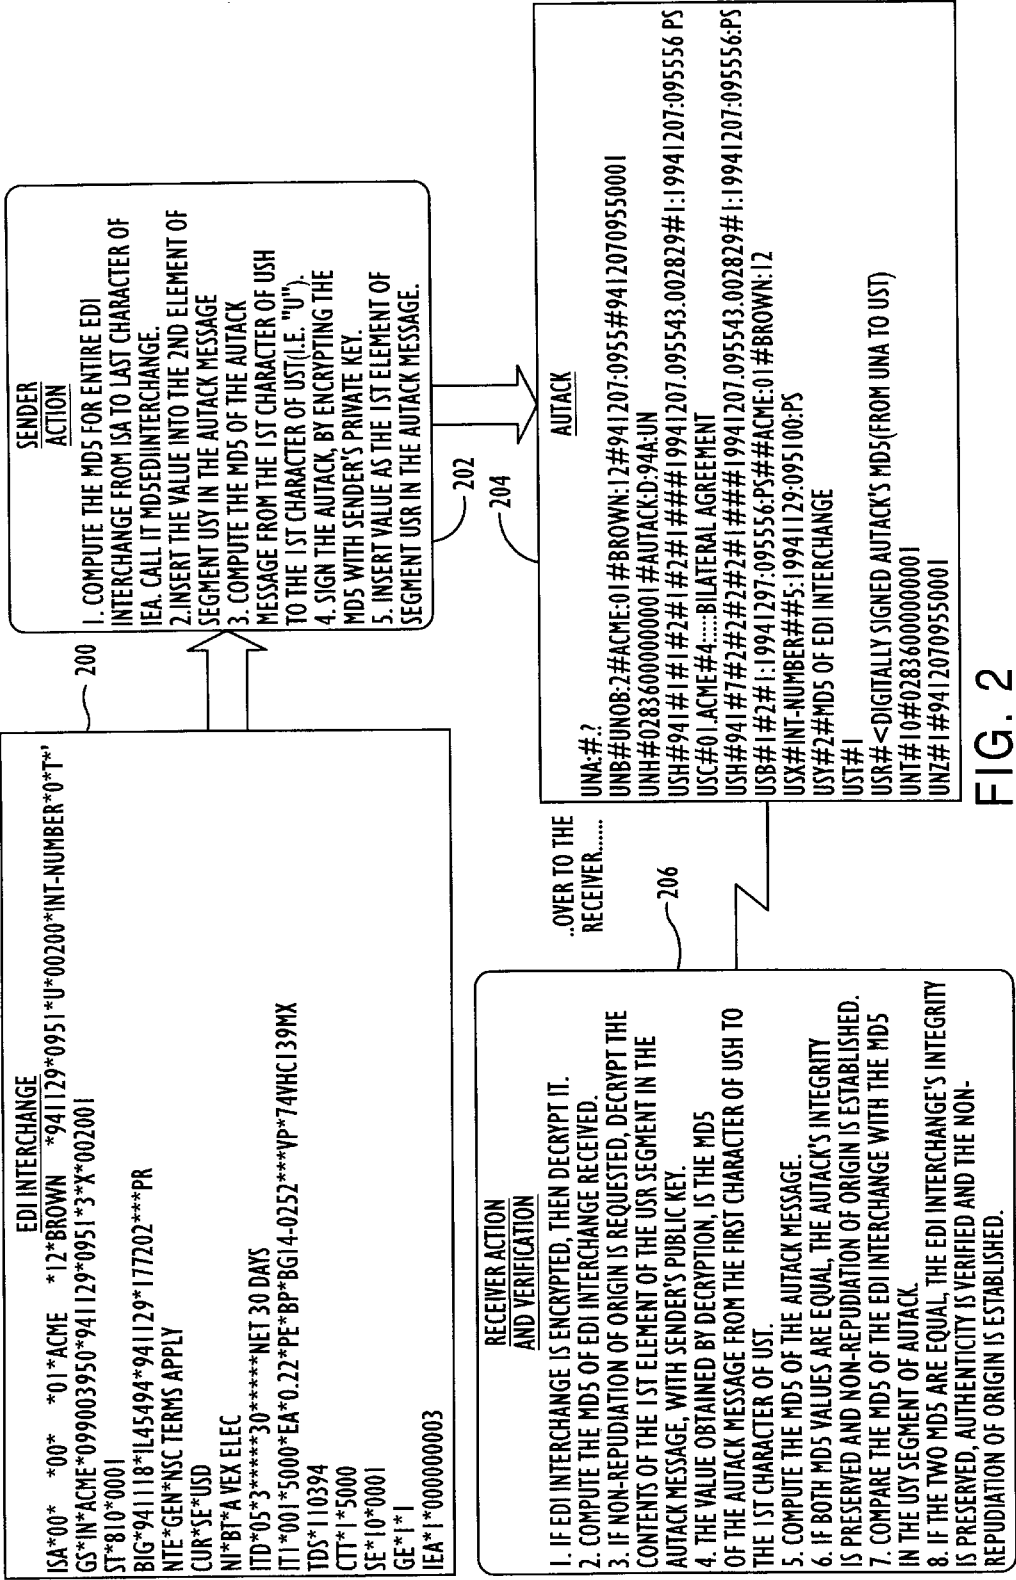


FIG. 1



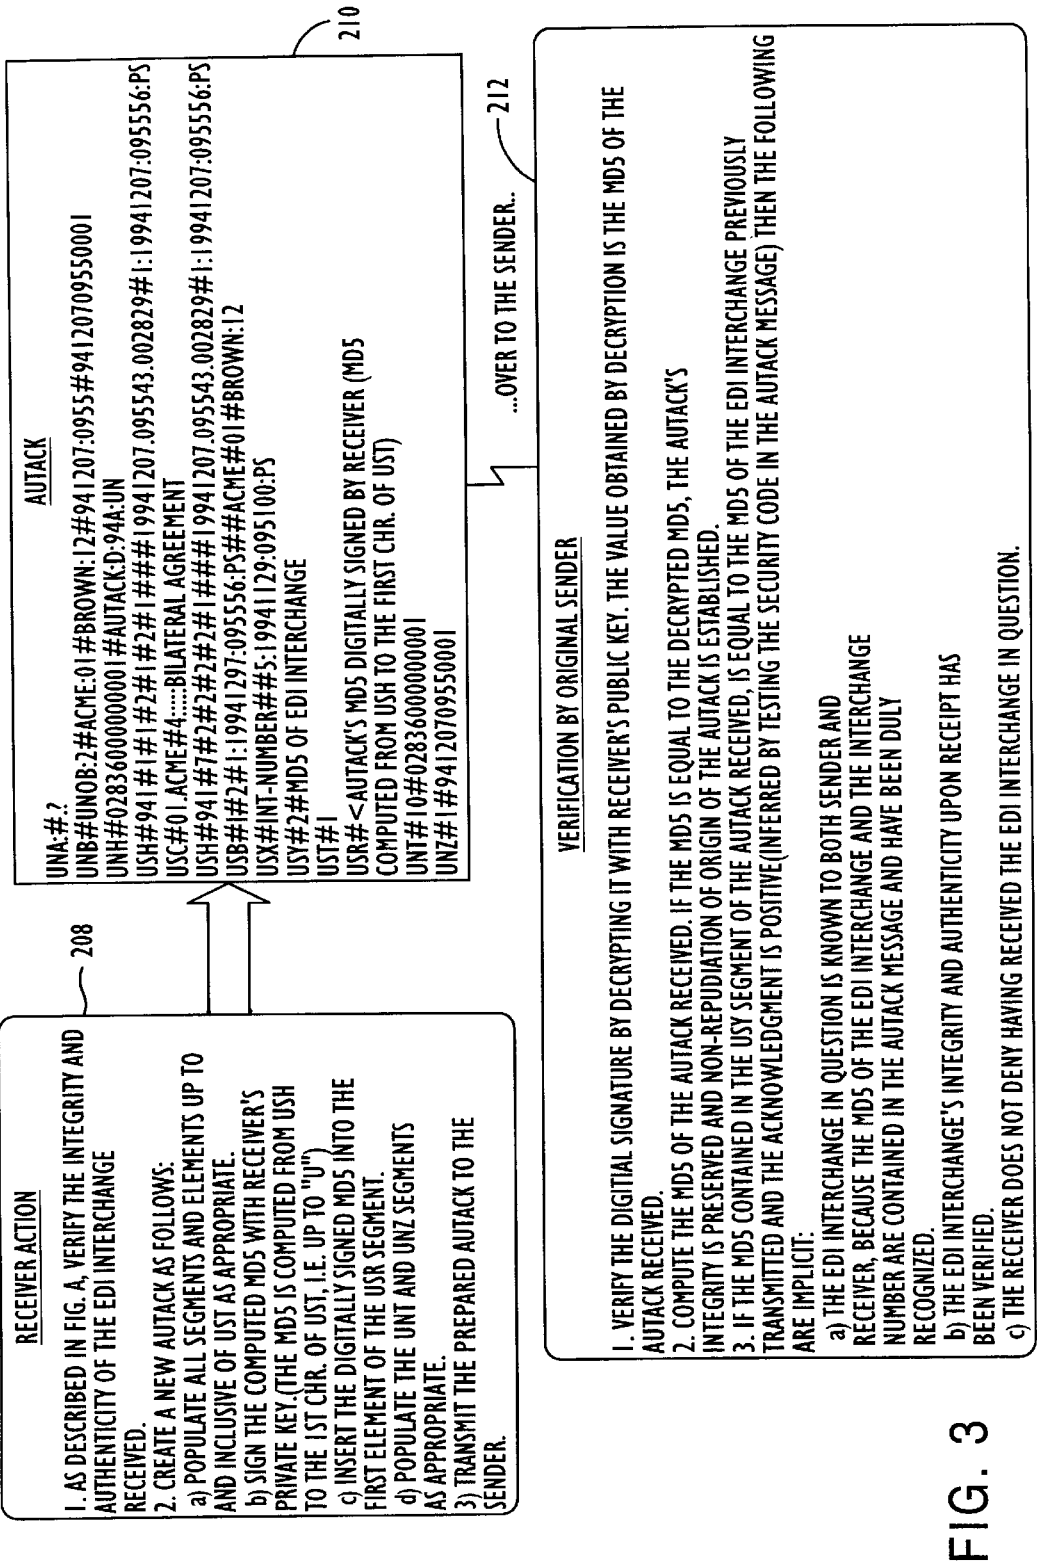


FIG. 3

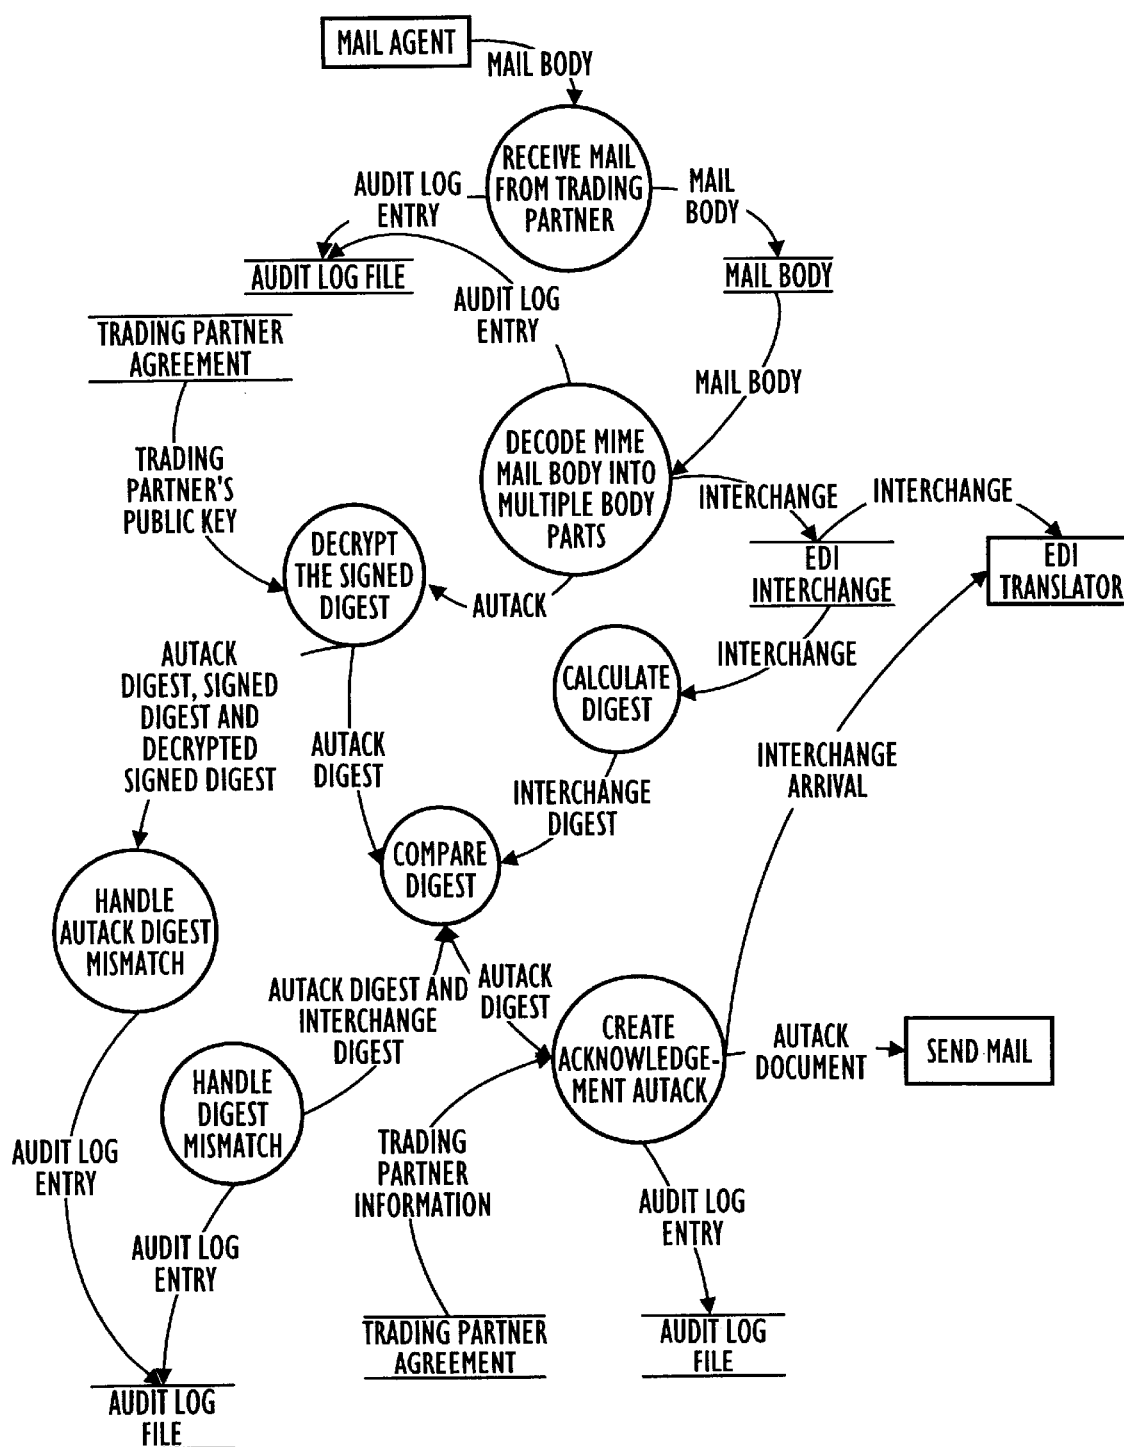


FIG. 4

U.S. Patent

Sep. 22, 1998

Sheet 5 of 43

5,812,669

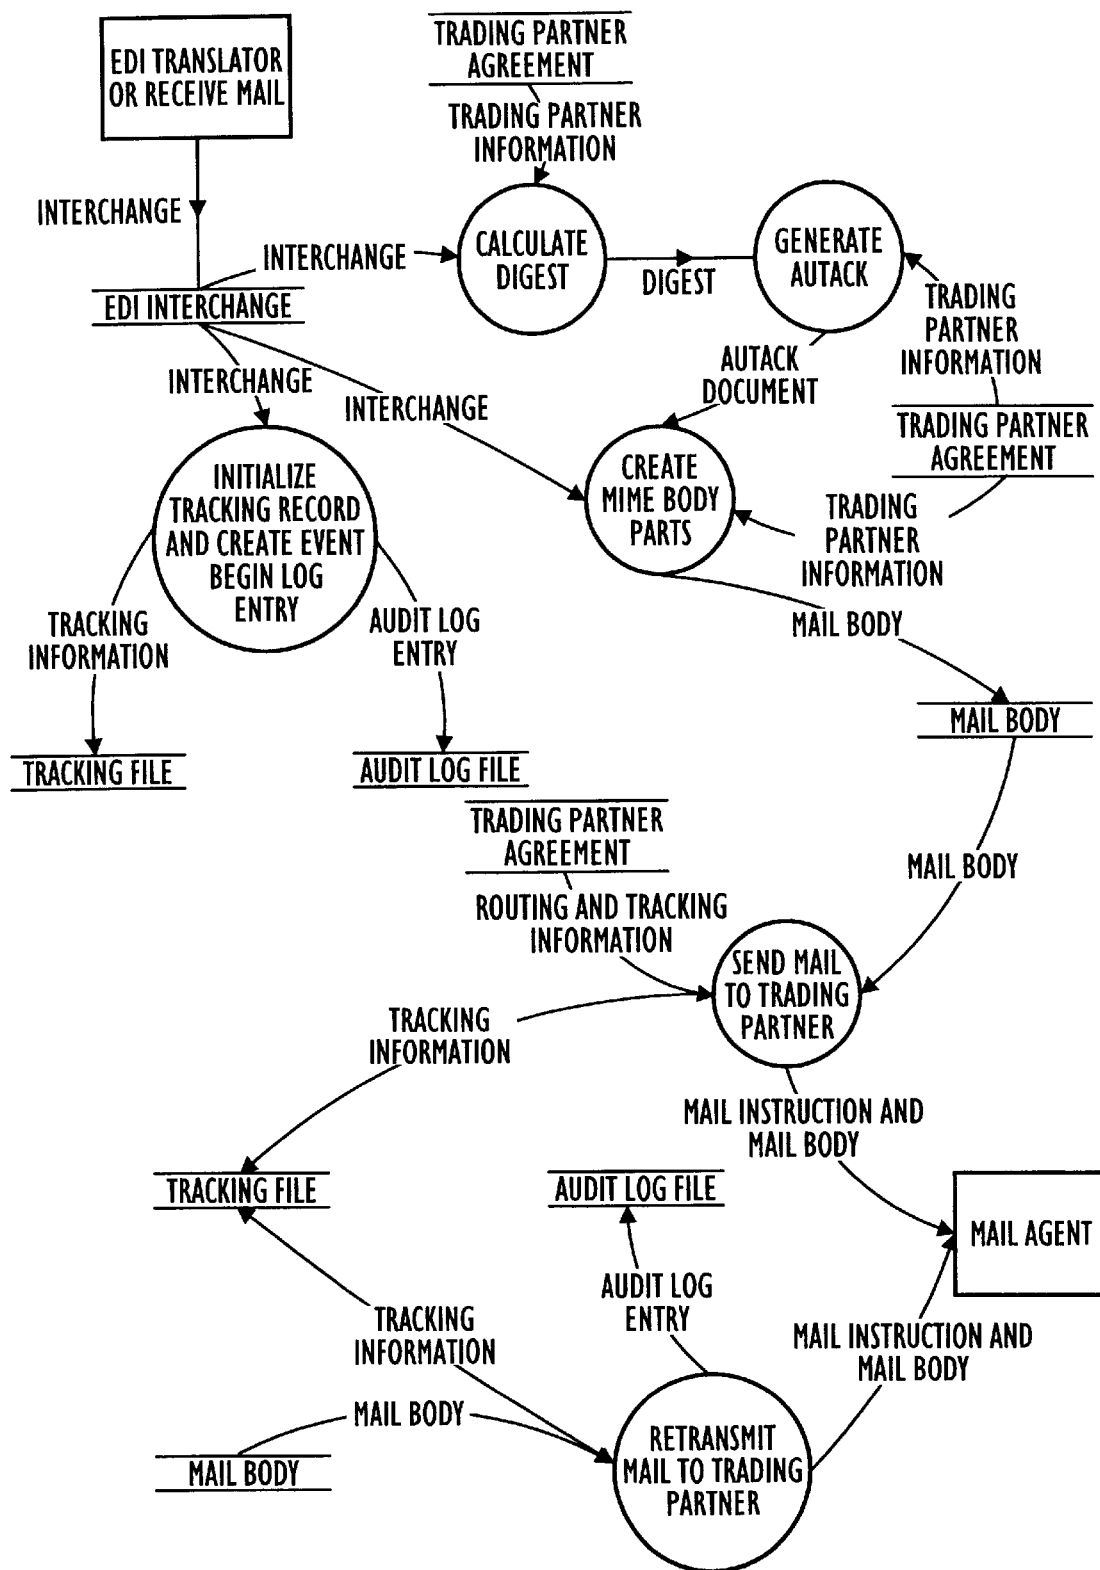


FIG. 5

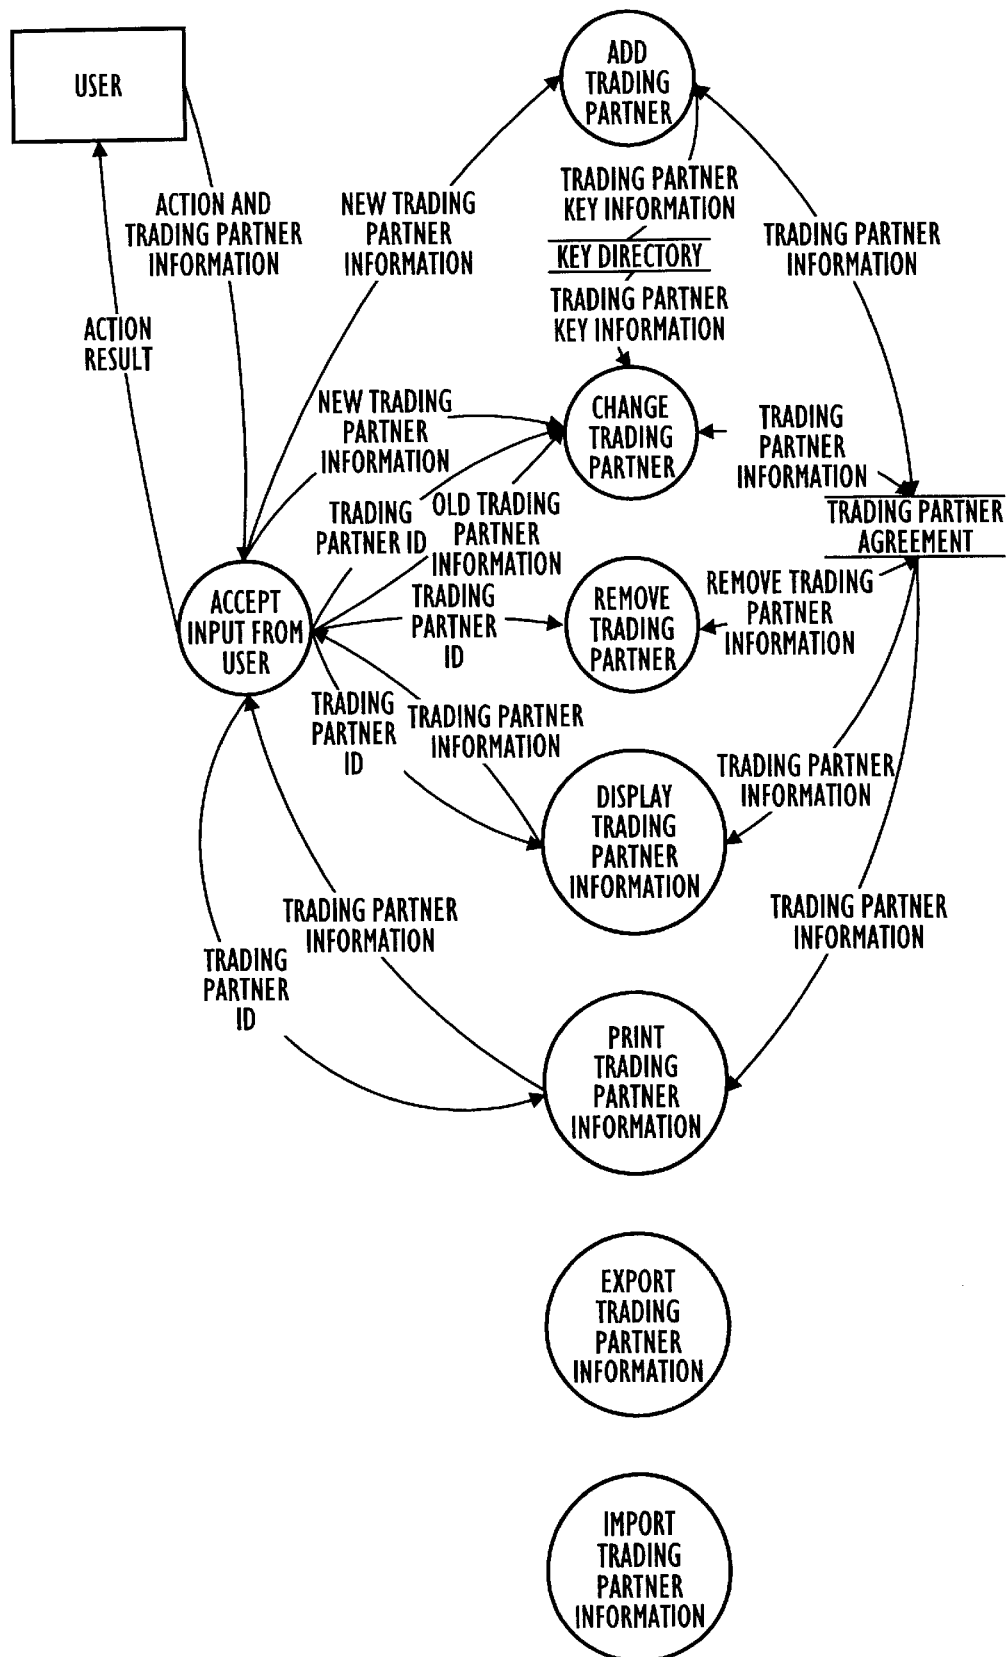


FIG.6

U.S. Patent

Sep. 22, 1998

Sheet 7 of 43

5,812,669

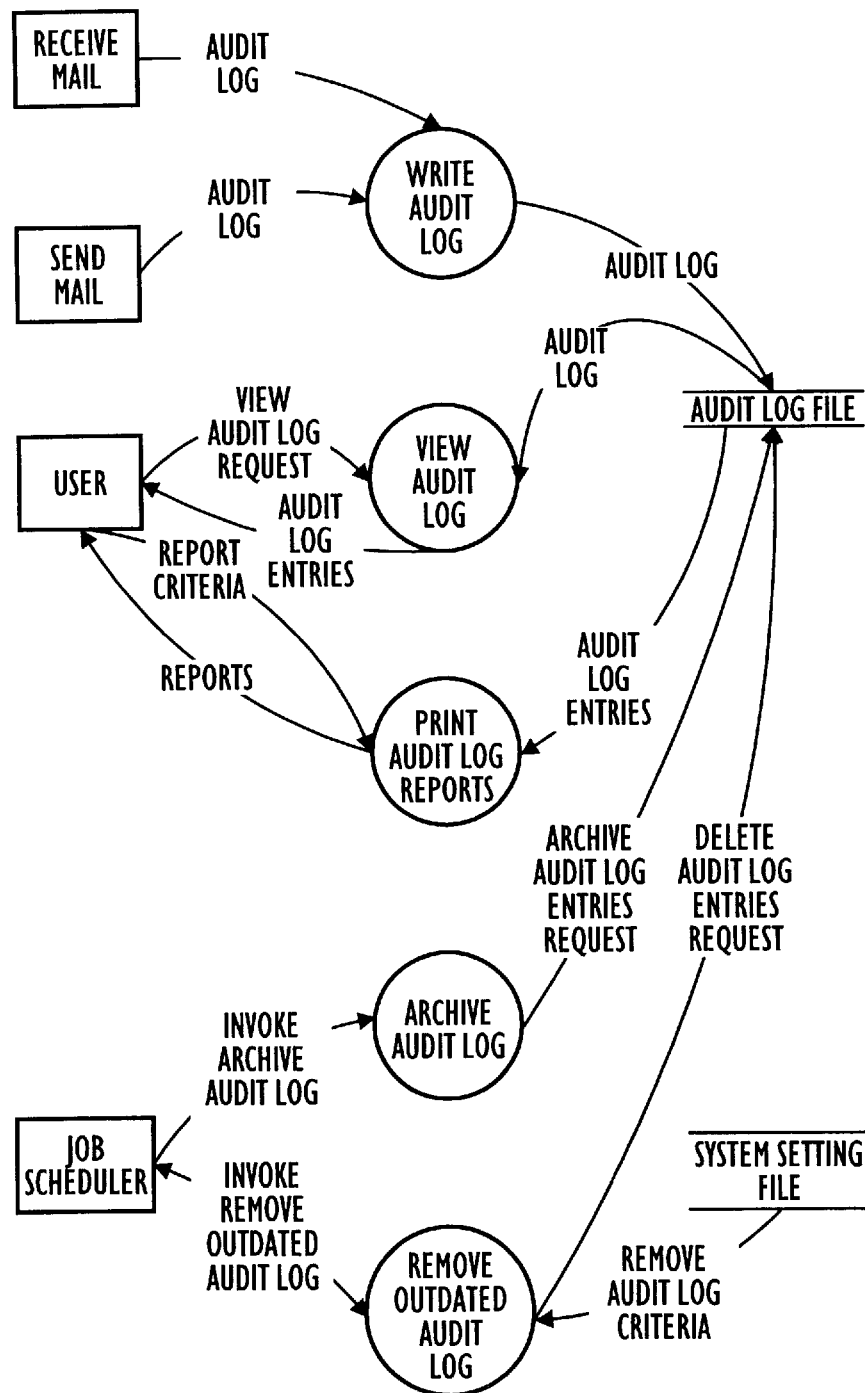


FIG. 7

U.S. Patent

Sep. 22, 1998

Sheet 8 of 43

5,812,669

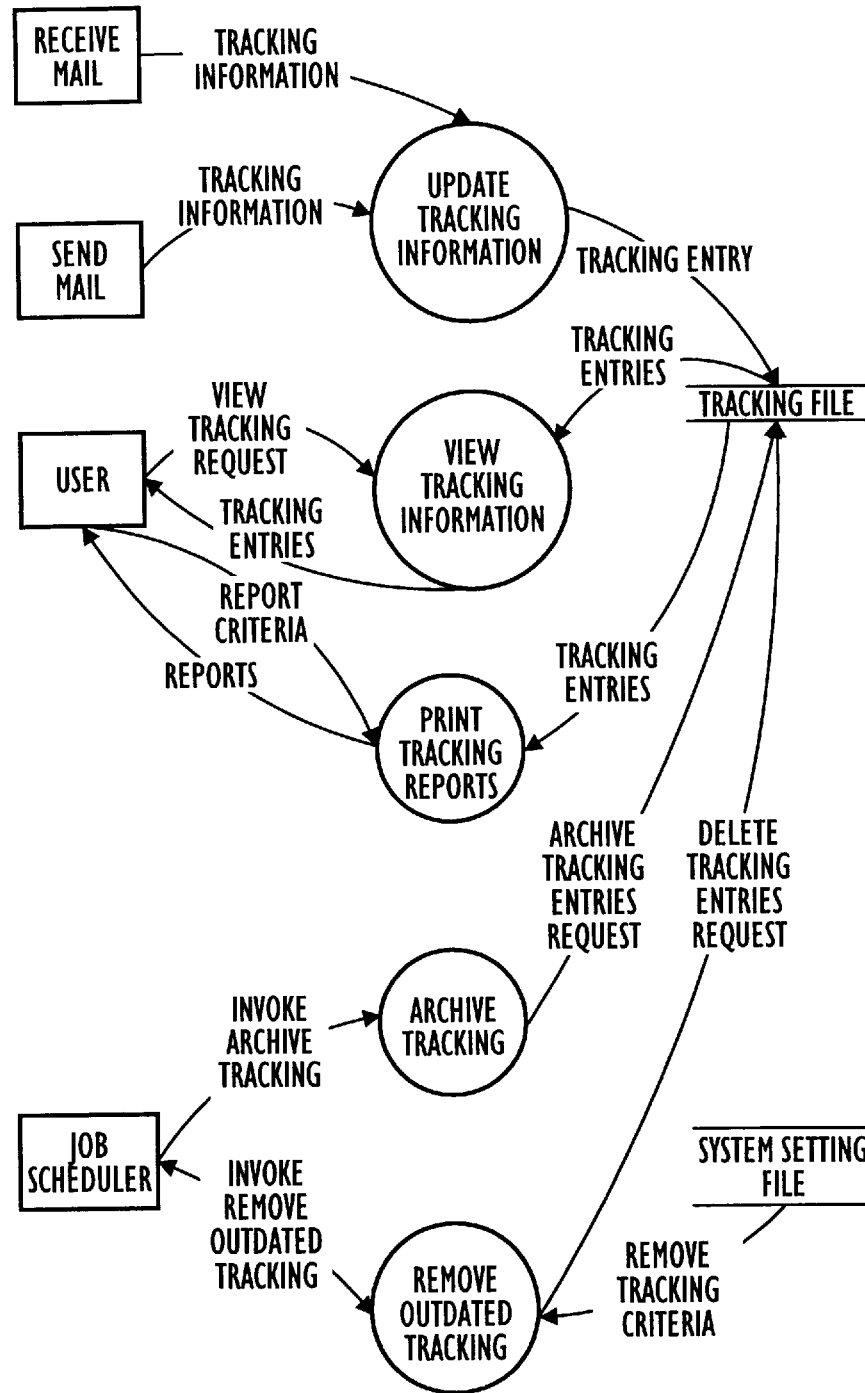


FIG.8

U.S. Patent

Sep. 22, 1998

Sheet 9 of 43

5,812,669

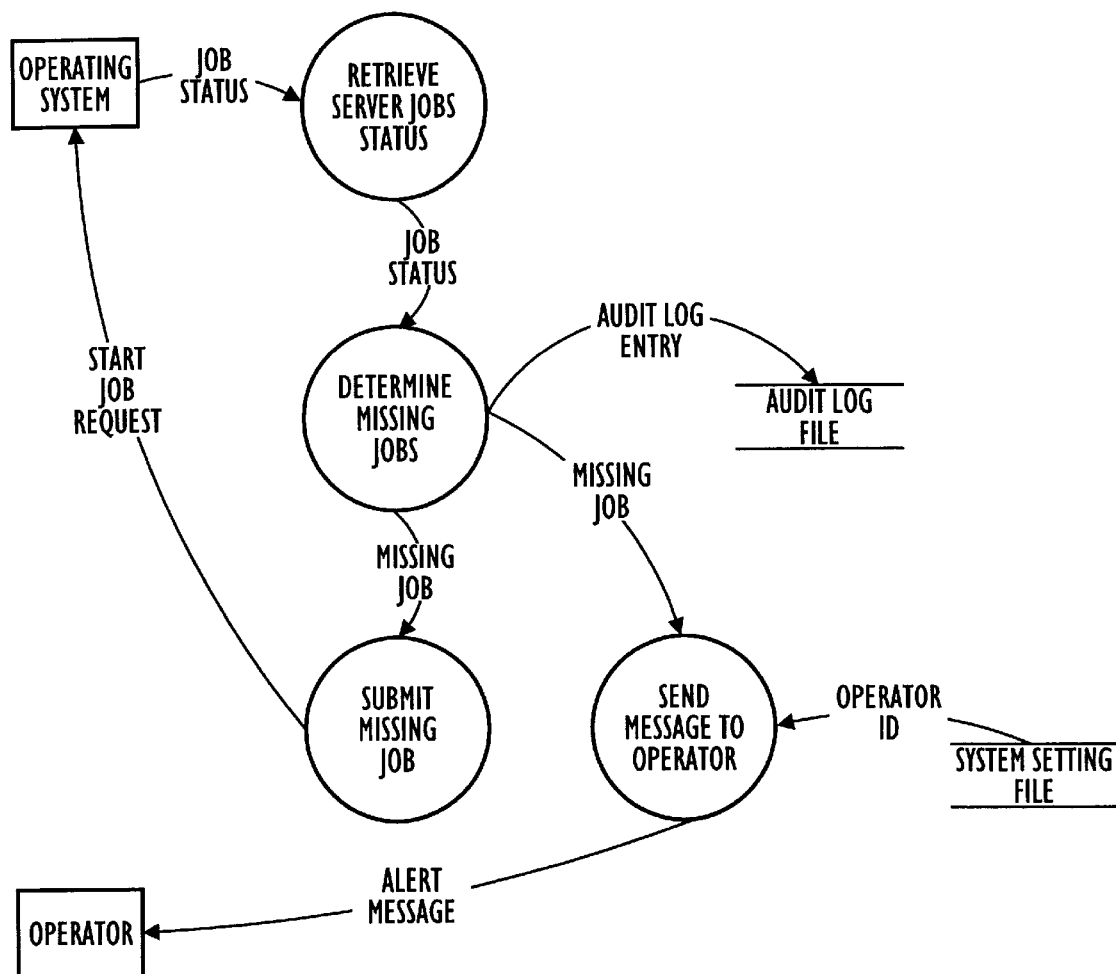


FIG.9

U.S. Patent

Sep. 22, 1998

Sheet 10 of 43

5,812,669

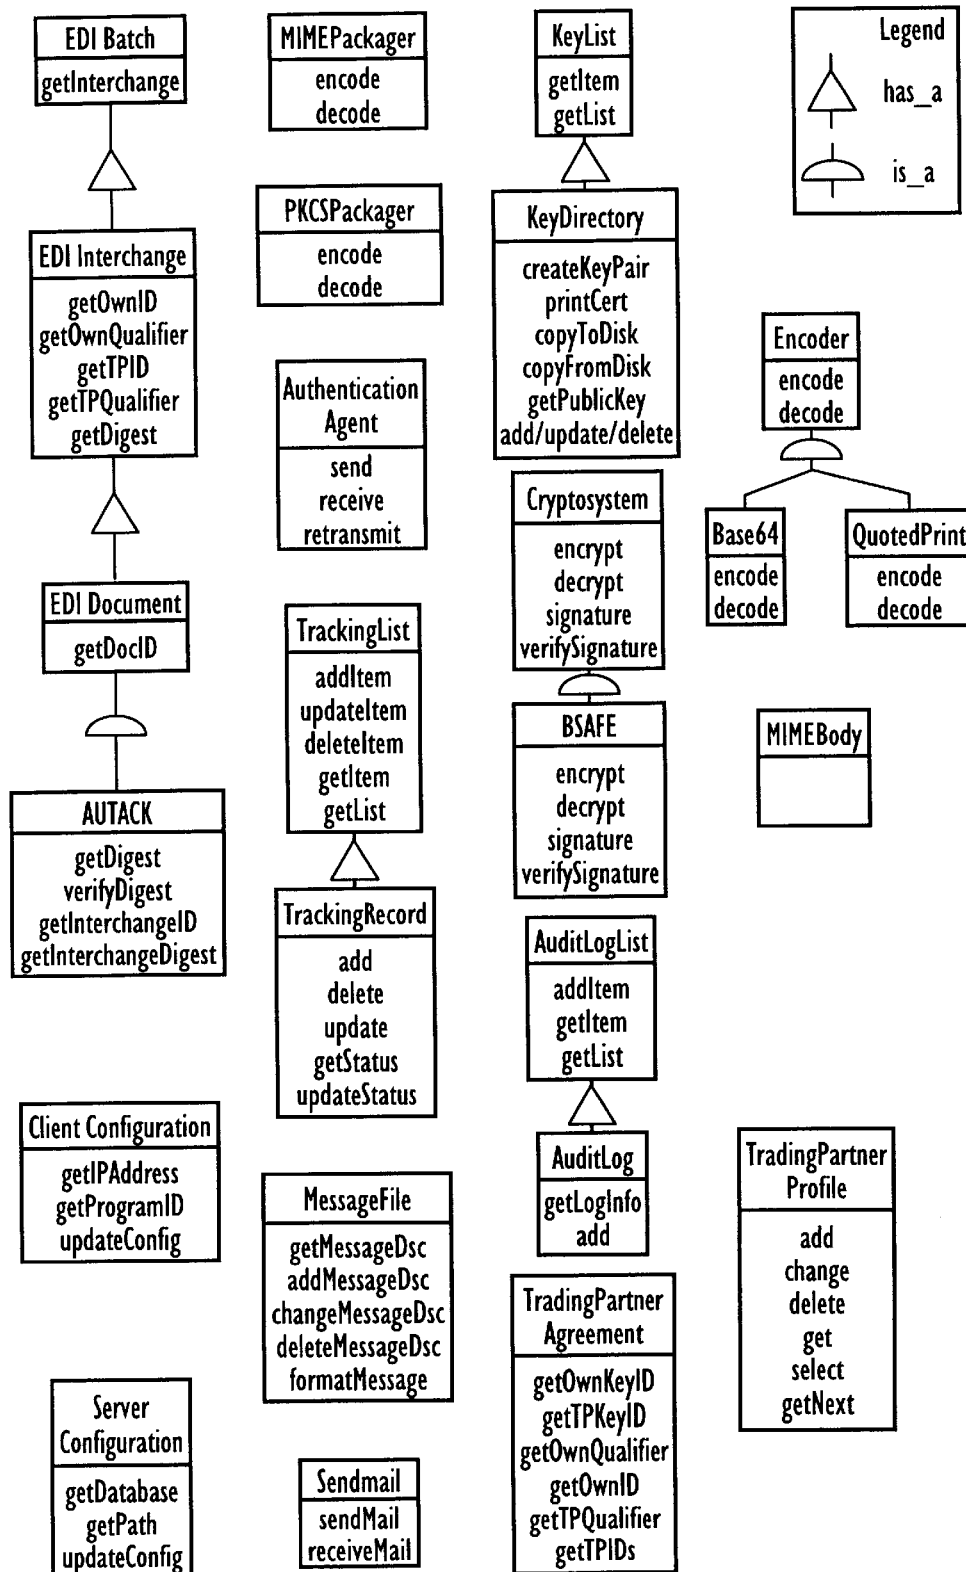
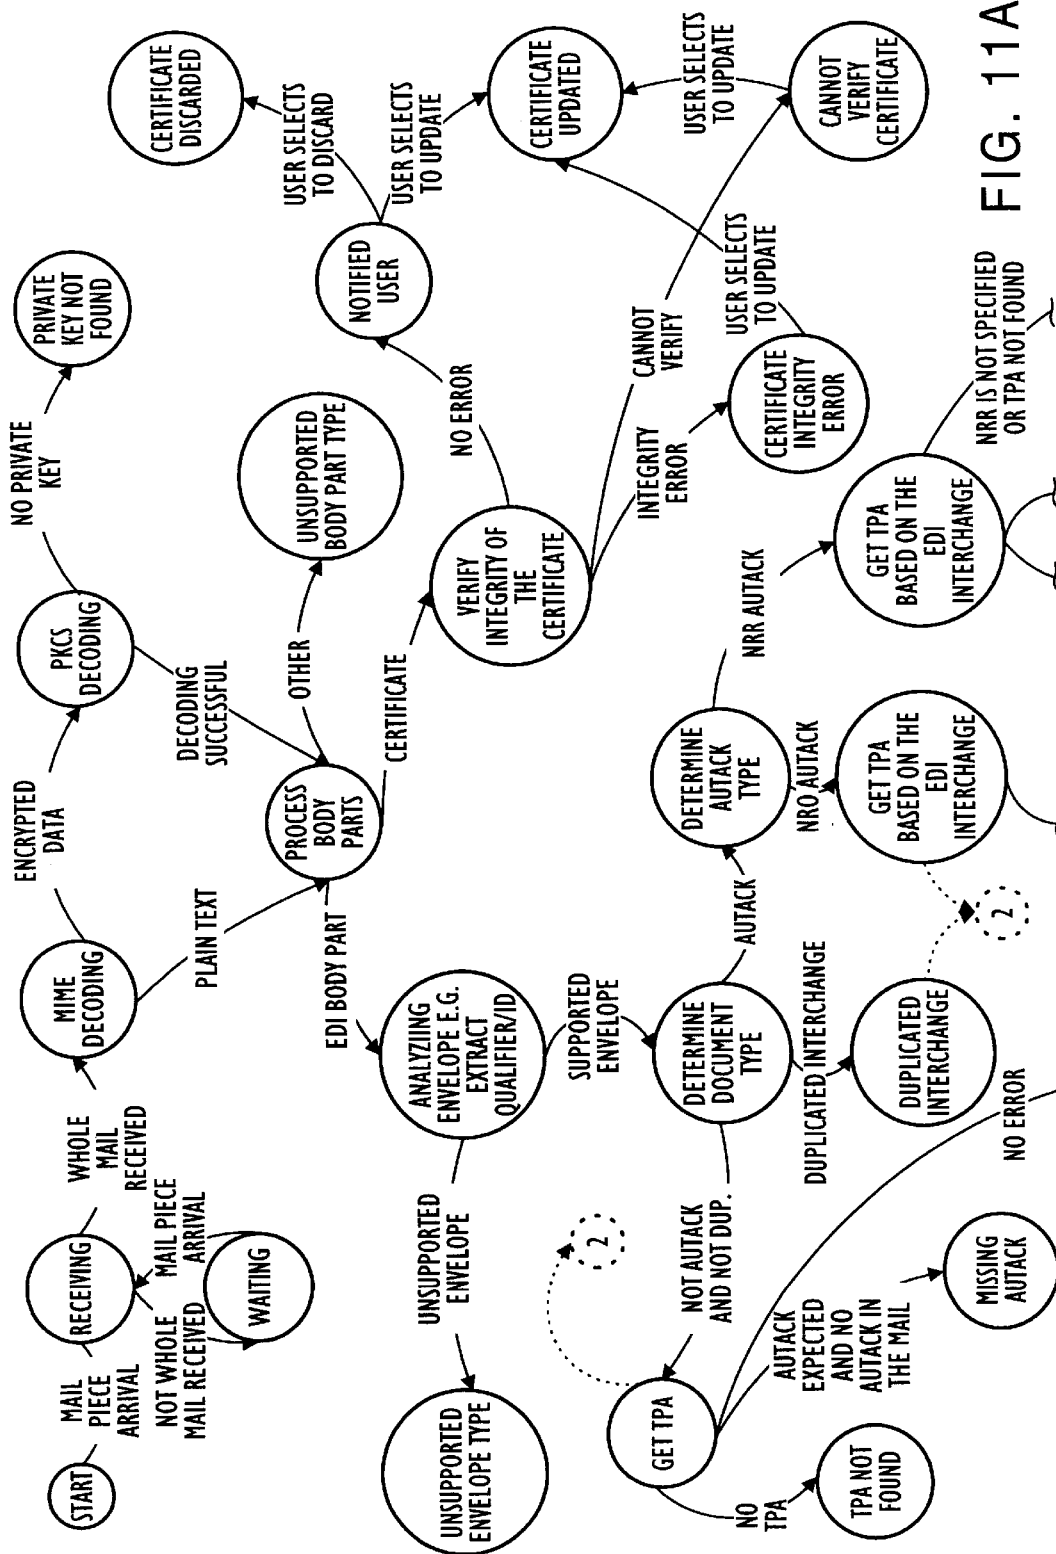


FIG.10



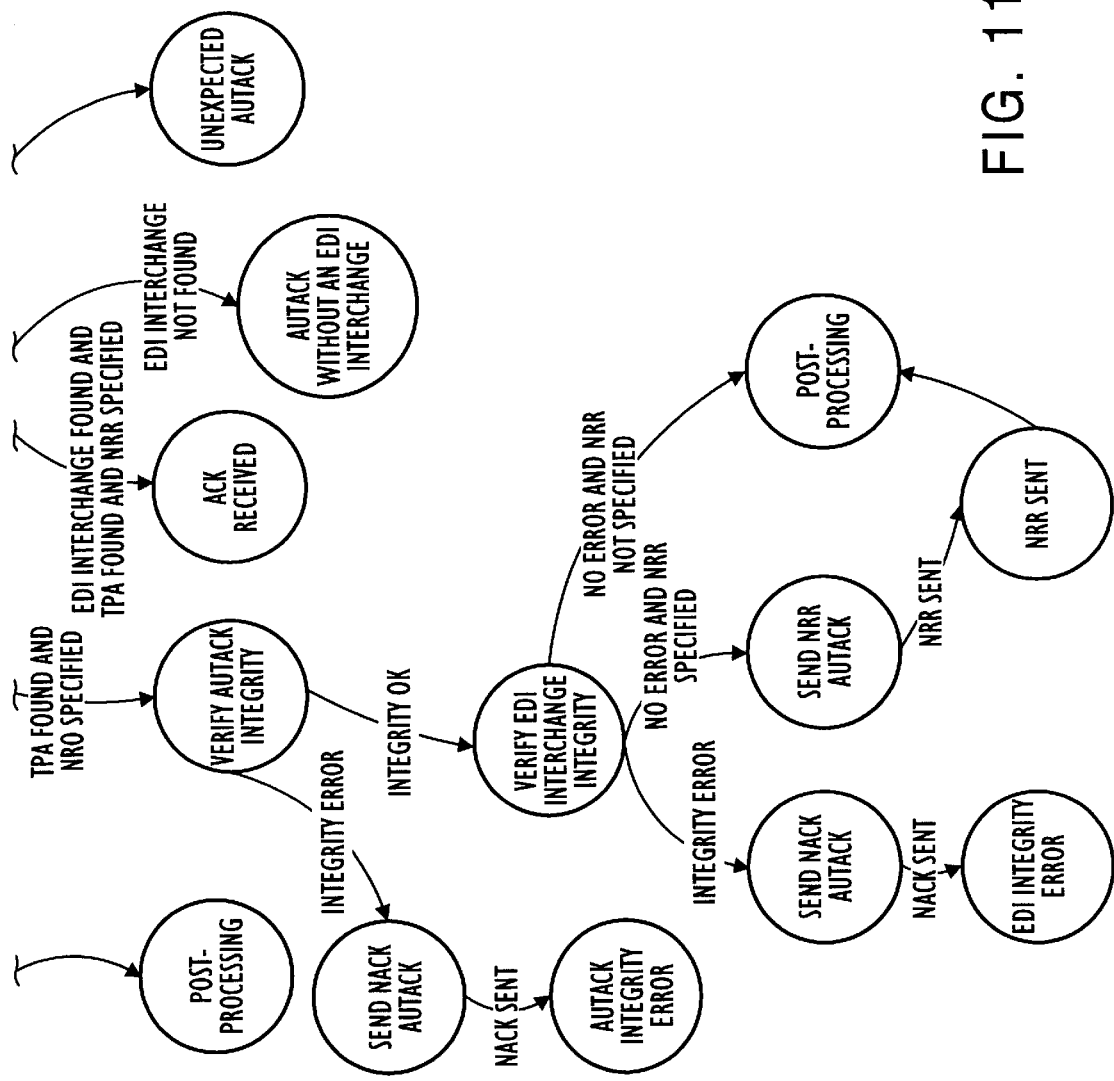


FIG. 11B

U.S. Patent

Sep. 22, 1998

Sheet 13 of 43

5,812,669


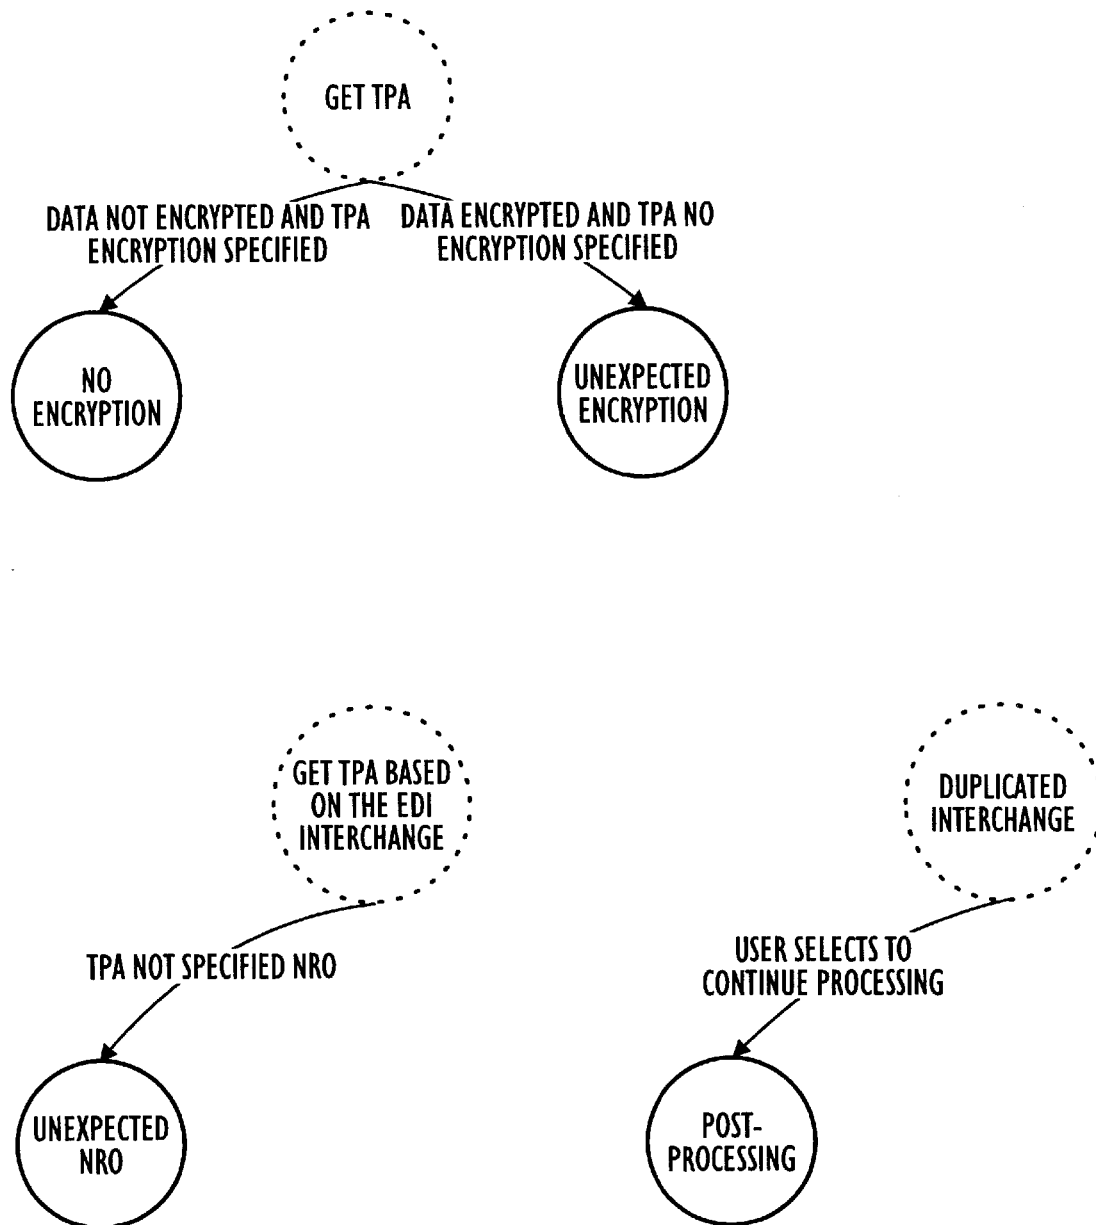


FIG. 12

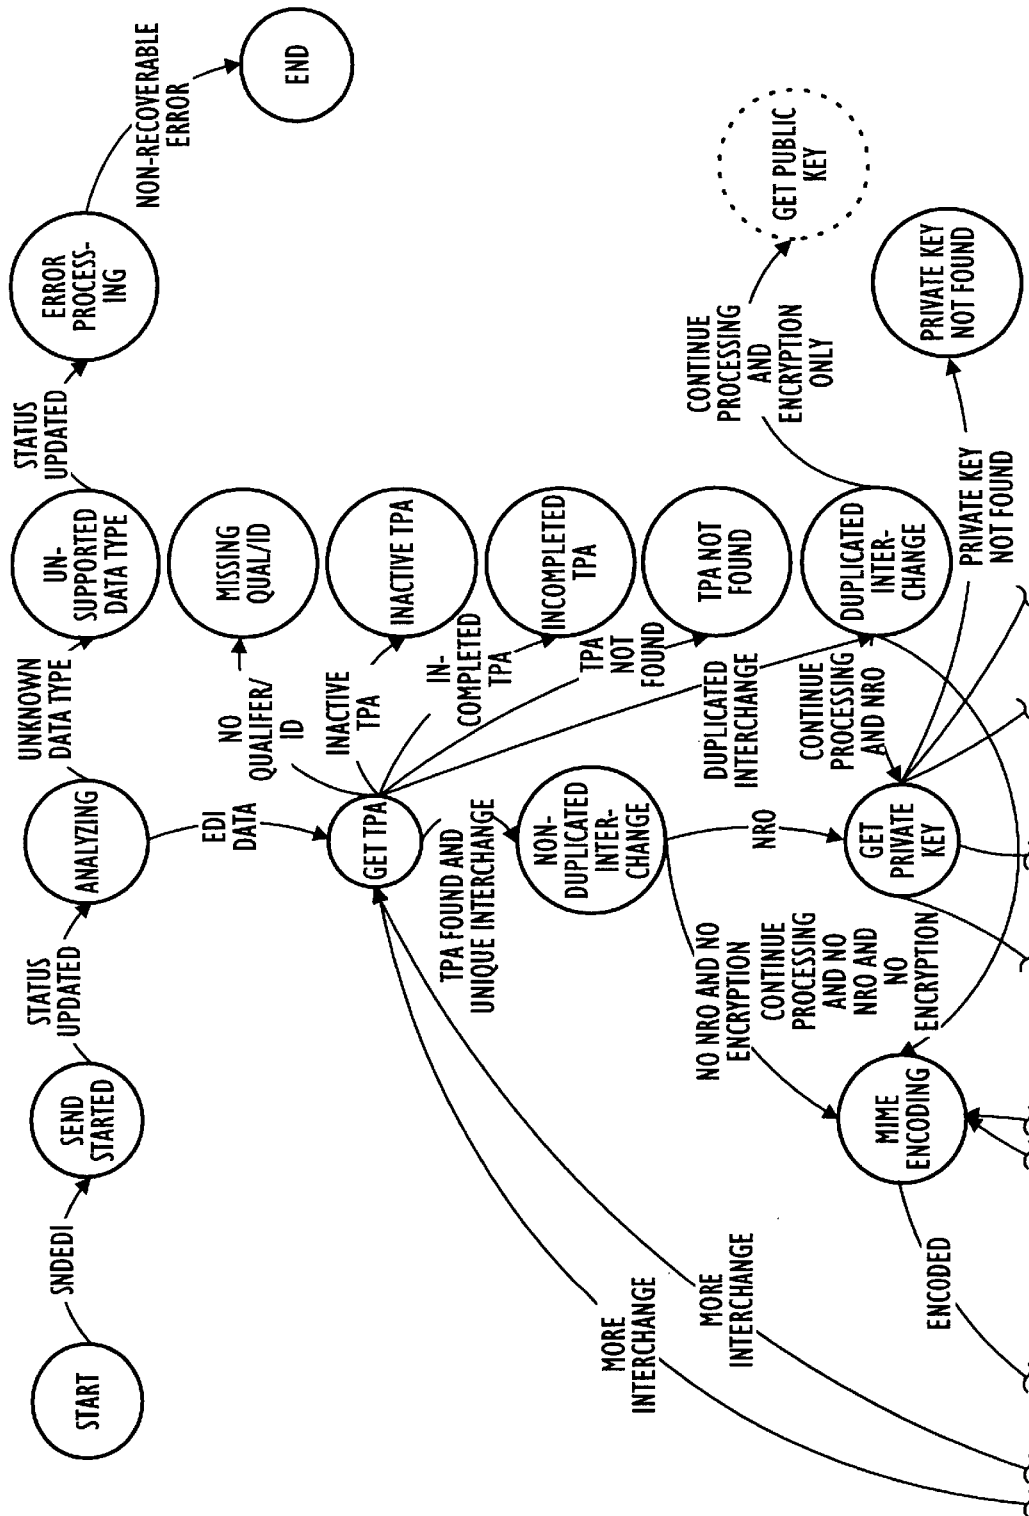

**FIG. 13A**

U.S. Patent

Sep. 22, 1998

Sheet 15 of 43

5,812,669

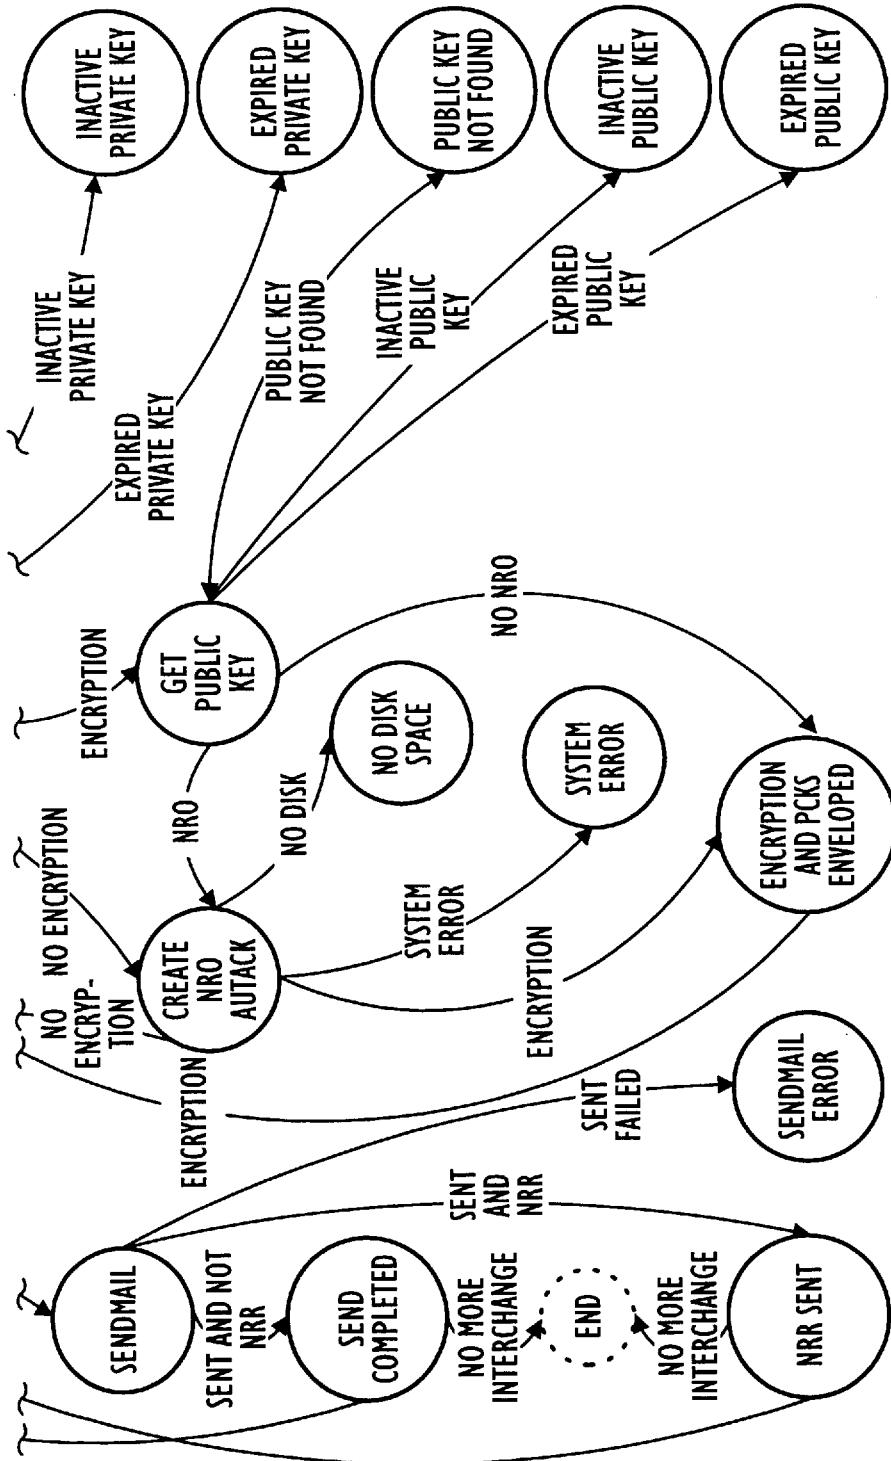



FIG. 13B

**U.S. Patent**

Sep. 22, 1998

Sheet 16 of 43

**5,812,669**

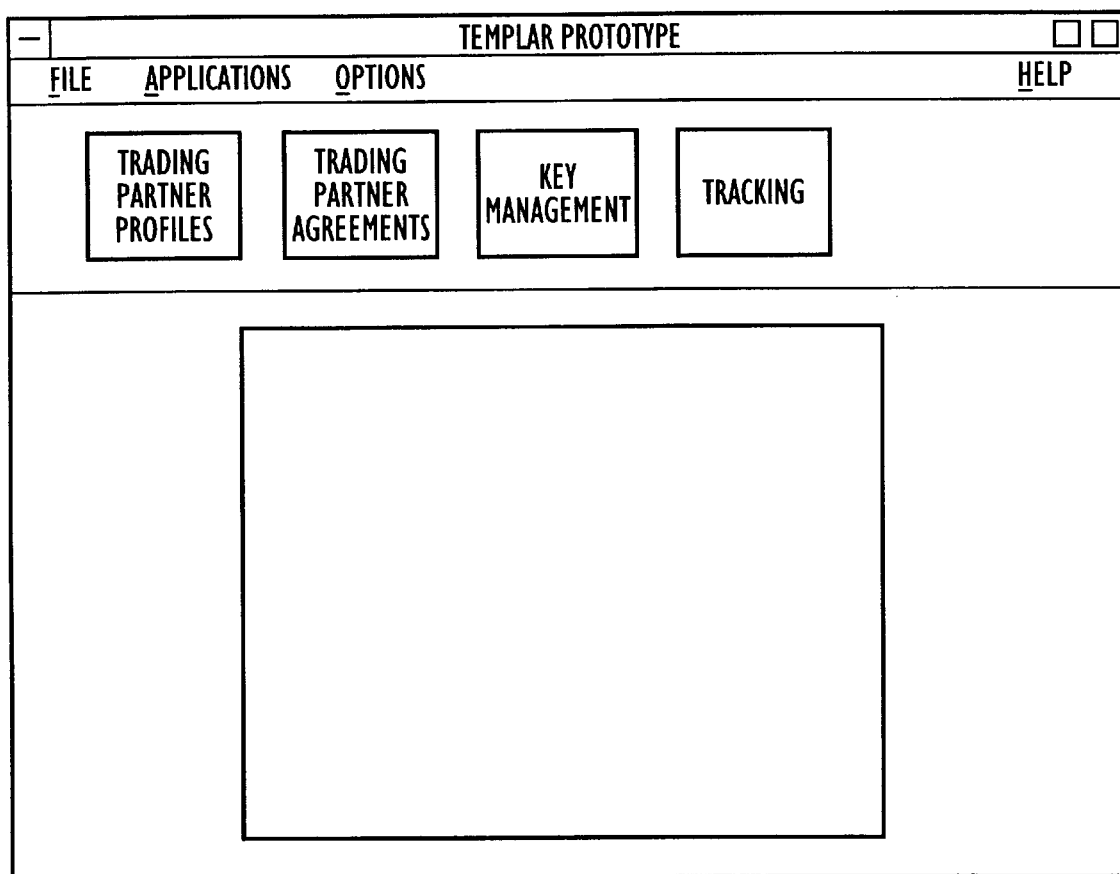

**FIG. 14**

—			TRADING PARTNER PROFILES		<input type="checkbox"/>	<input type="checkbox"/>
<u>F</u> ILE		<u>E</u> EDIT		<u>K</u> EYS		<u>H</u> ELP
TRADING PARTNER ID			COMPANY NAME		TYPE	
CISCO			CISCO TRADING PARTNER		REMOTE	
SEARS			SEARS TRADING PARTNER		REMOTE	
ME			MYSELF HERE		LOCAL	

FIG. 15

U.S. Patent

Sep. 22, 1998

Sheet 18 of 43

5,812,669

TRADING PARTNER PROFILE					
TRADING PARTNER ID	TRADING PARTNER				
COMPANY NAME	COMPANY NAME				
ADDRESS	COMPANY NAME				
	COMPANY NAME				
	COMPANY NAME				
TYPE	REMOTE				
EDI QUALIFIER/ID	CONTACT INFO...				
<table border="1"><thead><tr><th>QUALIFIER</th><th>ID</th></tr></thead><tbody><tr><td colspan="2"></td></tr></tbody></table>		QUALIFIER	ID		
QUALIFIER	ID				
<div>ADD...      MODIFY...      REMOVE</div>					
BIND KEYS...					
<div>OK      CANCEL      HELP</div>					

FIG. 16

**U.S. Patent**

Sep. 22, 1998

Sheet 19 of 43

**5,812,669**

TRADING PARTNER PROFILE - CONTACT INFORMATION	
NAME	<input type="text"/>
TITLE	<input type="text"/>
PHONE	<input type="text"/>
FAX	<input type="text"/>
E-MAIL	<input type="text"/>
COMMENTS	<div><div></div><div>▲▼</div></div>
<div><div>OK</div><div>CANCEL</div><div>HELP</div></div>	

**FIG. 17**

**U.S. Patent**

Sep. 22, 1998

Sheet 20 of 43

**5,812,669**

EDI QUALIFIER / ID	
QUALIFIER	<input type="text"/>
ID	<input type="text"/>
<input type="button" value="OK"/>	<input type="button" value="CANCEL"/>
<input type="button" value="HELP"/>	

**FIG. 18**

**U.S. Patent**

Sep. 22, 1998

Sheet 21 of 43

**5,812,669**

TRADING PARTNER - BOUND KEYS

TRADING PARTNER ID

COMPANY NAME

BOUND KEYS

KEY ID	DISTINGUISHED NAME	TYPE
COSTCO	COSCO PUBLIC KEY	REMOTE
PREMENOS	PREMENOS PUBLIC KEY	LOCAL

BIND...

UNBIND...

PRINT

CLOSE

HELP

**FIG. 19**

**U.S. Patent**

Sep. 22, 1998

Sheet 22 of 43

**5,812,669**

**TRADING PARTNER -- BIND KEYS**

TRADING PARTNER ID

COMPANY NAME

SELECT A KEY TO BIND AND PRESS OK

KEY ID	DISTINGUISHED NAME	TYPE
CISCO	THE CISCO PUBLIC KEY	REMOTE
SEARS	THE SEARS PUBLIC KEY	REMOTE


**FIG. 20**

**U.S. Patent**

Sep. 22, 1998

Sheet 23 of 43

**5,812,669**

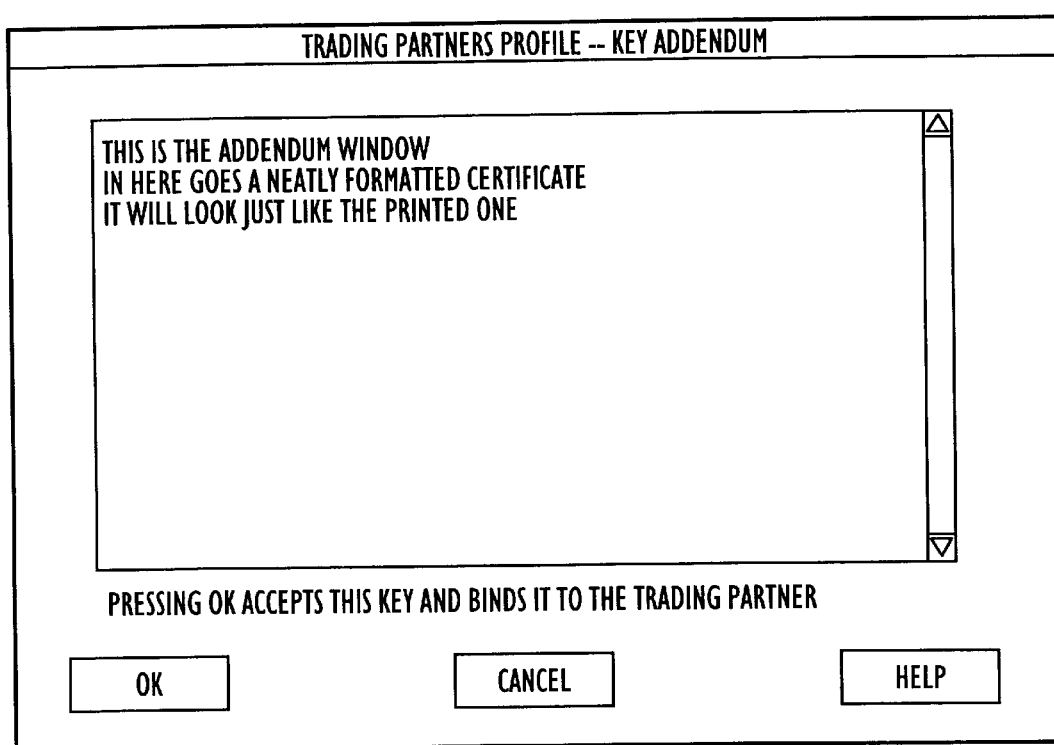

**FIG. 21**

**U.S. Patent**

Sep. 22, 1998

Sheet 24 of 43

**5,812,669**

TRADING PARTNER AGREEMENTS				
FILE	EDIT	VIEW	HELP	
REMOTE	LOCAL	INBOUND STATUS	OUTBOUND STATUS	
CISCO	ME	ACTIVE	UNDEFINED	
SEARS	PREMENOS	UNDEFINED	ACTIVE	
DEI	ME	HELD	UNDEFINED	

**FIG. 22**

U.S. Patent

Sep. 22, 1998

Sheet 25 of 43

5,812,669

TRADING PARTNER AGREEMENT		
REMOTE TRADING PARTNER		
REMOTE ID	SEARS	↓
KEY ID		↓
QUALIFIER / ID		↓
LOCAL TRADING PARTNER		
LOCAL ID	ME	↓
KEY ID		↓
QUALIFIER / ID		↓
INBOUND ROUTING STATUS	ACTIVE _	DETAILS ...
OUTBOUND ROUTING STATUS	ACTIVE _	DETAILS ...
OK	CANCEL	HELP

FIG. 23

**U.S. Patent**

Sep. 22, 1998

Sheet 26 of 43

**5,812,669**

TRADING PARTNER AGREEMENT - INBOUND ROUTING		
REMOTE ID	<input type="text"/>	
LOCAL ID	<input type="text"/>	STATUS <input type="text"/>
SECURITY		
<input type="checkbox"/> EXPECT NON-REPUDIATION OF ORIGIN		
<input type="checkbox"/> GENERATE NON-REPUDIATION OF RECEIPT		
REMOTE QUALIFIER / ID	<input type="text"/>	<input type="button" value="↓"/>
LOCAL QUALIFIER / ID	<input type="text"/>	<input type="button" value="↓"/>
EXPECT ENCRYPTION	<input type="button" value="NONE"/>	
POST PROCESSING		
DIRECTORY	<input type="text"/>	
COMMAND	<input type="text"/>	
<input type="button" value="OK"/> <input type="button" value="CANCEL"/> <input type="button" value="HELP"/>		

**FIG. 24**

**U.S. Patent**

Sep. 22, 1998

Sheet 27 of 43

**5,812,669**

TRADING PARTNER AGREEMENT - OUTBOUND ROUTING		
REMOTE ID	<input style="width: 95%;" type="text"/>	
LOCAL ID	<input style="width: 95%;" type="text"/>	STATUS <input style="width: 100%;" type="text"/>
<input type="checkbox"/> SECURITY <input type="checkbox"/> TRANSPORT <input type="checkbox"/> RETRANSMISSION		
<div style="border: 1px solid black; padding: 5px;"> <p>SECURITY</p> <p><input type="checkbox"/> GENERATE NON-REPUDIATION OF ORIGIN</p> <p>REMOTE QUALIFIER / ID <input style="width: 150%;" type="text"/> <input style="width: 20px; height: 15px; text-align: center; vertical-align: middle;"/>↓</p> <p>LOCAL QUALIFIER / ID <input style="width: 150%;" type="text"/> <input style="width: 20px; height: 15px; text-align: center; vertical-align: middle;"/>↓</p> <p><input type="checkbox"/> EXPECT NON-REPUDIATION OF RECEIPT</p> <p>GENERATE ENCRYPTION <span style="margin-left: 50px;"><input style="width: 50px; height: 15px; text-align: center;" type="text" value="NONE"/></span></p> </div>		
<div style="display: flex; justify-content: space-around; width: 100%;"> <div style="border: 1px solid black; padding: 5px 20px;">OK</div> <div style="border: 1px solid black; padding: 5px 20px;">CANCEL</div> <div style="border: 1px solid black; padding: 5px 20px;">HELP</div> </div>		

**FIG. 25**

U.S. Patent

Sep. 22, 1998

Sheet 28 of 43

5,812,669

TRADING PARTNER AGREEMENT - OUTBOUND ROUTING

REMOTE ID

LOCAL ID  STATUS

☐ SECURITY ☐ TRANSPORT ☐ RETRANSMISSION

TRANSPORT

E-MAIL ADDRESSES

SENDER

RECEIVER

MAXIMUM MIME MESSAGE SIZE

OK CANCEL HELP

FIG. 26

U.S. Patent

Sep. 22, 1998

Sheet 29 of 43

5,812,669

**TRADING PARTNER AGREEMENT - OUTBOUND ROUTING**

REMOTE NAME

LOCAL NAME  STATUS

☐ SECURITY ☐ TRANSPORT ☐ RETRANSMISSION

RETRANSMISSION

TIME	ACTION

FIG. 27

**U.S. Patent**

Sep. 22, 1998

Sheet 30 of 43

**5,812,669**

OUTBOUND RETRANSMISSION	
ELAPSED TIME	HH:MM:SS
ACTION	SEND E-MAIL
	RETRANSMIT
	SEND E-MAIL
	RETRANSMIT AND SEND E-MAIL
	USER DEFINED
E-MAIL ADDRESS	
<div>OK</div> <div>CANCEL</div> <div>HELP</div>	

**FIG. 28**

**U.S. Patent**

Sep. 22, 1998

Sheet 31 of 43

**5,812,669**

KEY MANAGEMENT				
FILE	EDIT	VIEW	HELP	
KEY ID	DISTINGUISHED NAME	EFFECTIVE DATE	TYPE	STATUS
CISCO	THE CISCO PUBLIC KEY	MM:DD:YY	REMOTE	ACTIVE
MINE	MY PUBLIC KEY	MM:DD:YY	LOCAL	ACTIVE
SEARS	SEARS PUBLIC KEY	MM:DD:YY	REMOTE	ACTIVE

**FIG. 29**

U.S. Patent

Sep. 22, 1998

Sheet 32 of 43

5,812,669





KEY-LOCAL	
KEY ID	<input type="text" value="REIFY"/>
DISTINGUISHED NAME	
COUNTRY	<input type="text" value="AF AFGHANISTAN"/> 
ORGANIZATION	<input type="text" value="KKK"/>
ORGANIZATIONAL UNIT	<input type="text" value="ALABAMA"/>
SERIAL NUMBER	<input type="text" value="XR7I"/>
EFFECTIVE DATE	<input type="text" value="MM/DD/YY HH:MM:SS"/>
STATUS	<input type="text" value="ACTIVE"/> 
<input type="button" value="DETAILS..."/>	
KEY GENERATION	
<input type="button" value="GENERATE KEY PAIR..."/>	
PUBLIC KEY	<input type="text"/>  
VERIFICATION DIGEST	<input type="text"/>
<input type="button" value="OK"/> <input type="button" value="CANCEL"/> <input type="button" value="HELP"/>	

FIG. 30

U.S. Patent

Sep. 22, 1998

Sheet 33 of 43

5,812,669

KEY-REMOTE	
KEY ID	<input type="text" value="SEARS"/>
<input type="button" value="IMPORT..."/>	
DISTINGUISHED NAME	
COUNTRY	<input type="text" value="AF AFGHANISTAN"/> <input type="button" value="↓"/>
ORGANIZATION	<input type="text" value="KKK"/>
ORGANIZATIONAL UNIT	<input type="text" value="ALABAMA"/>
SERIAL NUMBER	<input type="text" value="XR7I"/>
EFFECTIVE DATE	<input type="text" value="MM/DD/YY HH:MM:SS"/>
STATUS	<input type="text" value="ACTIVE"/> <input type="button" value="DETAILS..."/>
KEY	
PUBLIC KEY	<input type="text"/> <input type="button" value="↑"/> <input type="button" value="↓"/>
VERIFICATION DIGEST	<input type="text"/>
<input type="button" value="OK"/> <input type="button" value="CANCEL"/> <input type="button" value="HELP"/>	

FIG. 31

**U.S. Patent**

Sep. 22, 1998

Sheet 34 of 43

**5,812,669**

KEY DETAILS	
PHONE	<input type="text"/>
ADDRESS	<input type="text"/>
	<input type="text"/>
	<input type="text"/>
COMMENTS	<input type="text"/>
<div><input type="button" value="OK"/> <input type="button" value="CANCEL"/> <input type="button" value="HELP"/></div>	

**FIG. 32**

**U.S. Patent**

Sep. 22, 1998

Sheet 35 of 43

**5,812,669**

PUBLIC KEY - EXPORT	
KEY ID	<input type="text"/>
DISTINGUISHED NAME	<input type="text"/>
SERIAL NUMBER	<input type="text"/>
EFFECTIVE DATE	<input type="text" value="MM/DD/YY HH:MM:SS"/>
COPY PUBLIC KEY TO THE FOLLOWING FILE	
<input type="text"/>	<input type="button" value="BROWSE..."/>
<input type="button" value="OK"/>	<input type="button" value="CANCEL"/>
<input type="button" value="HELP"/>	

**FIG. 33**

U.S. Patent

Sep. 22, 1998

Sheet 36 of 43

5,812,669

TRACKING						
FILE	EDIT	OPERATIONS	VIEW	HELP		
STATUS	TRACKING #	TYPE	DIRECTION	USER FIELD	TO	FROM
X	9999999999	EDI	SEND	USER	SEARS	CISCO
X	9999999999	EDI	SEND	USER	ME	THEM

TRACKING # 999999999999  
DATA TYPE: EDI  
SENDER E-MAIL ADDRESS:  
RECEIVER E-MAIL ADDRESS:  
STATUS:  
TRACKING START DATE AND TIME: 99/99/9999 99:99:99  
NUMBER OF RETRANSMIT TRIED: 0  
LAST RETRANSMIT DATE 99/99/9999 :99:99:99  
USER DEFINED FIELD: USER  
INPUT FILE NAME: FILENAME  
TOTAL BYTE COUNT: 9999  
DATA BYTE COUNT: 9999  
NUMBER OF REPROCESSES: 9999  
CHANGE BY USER ID: USER  
DELETED:  
ARCHIVED:  
RESTORED:  
DUMP FILE NAME:

FIG. 34

TRACKING -- INTERCHANGES		
INTERCHANGE	AUTACK STATUS	REMOTE TRADING PARTNER
99999999999999999999	NRR SENT	CISCO
99999999999999999999	NRR RECV	SEARS

EDI: INTERCHANGE NUMBER: 99999999999999999999

NON-REPUDIATION OF RECEIPT AUTACK TRACKING ID: 9999999999

RECEIVED DATE AND TIME: 99/99/9999 99:99:99

NON-REPUDIATION OF RECEIPT AUTACK: SENT DATA AND TIME: 99/99/9999 99:99:99

STATUS:

DUPLICATED:

SENDER:

VIEW EDI DATA

PRINT...

CLOSE

HELP


FIG. 35

**U.S. Patent**

Sep. 22, 1998

Sheet 38 of 43

**5,812,669**

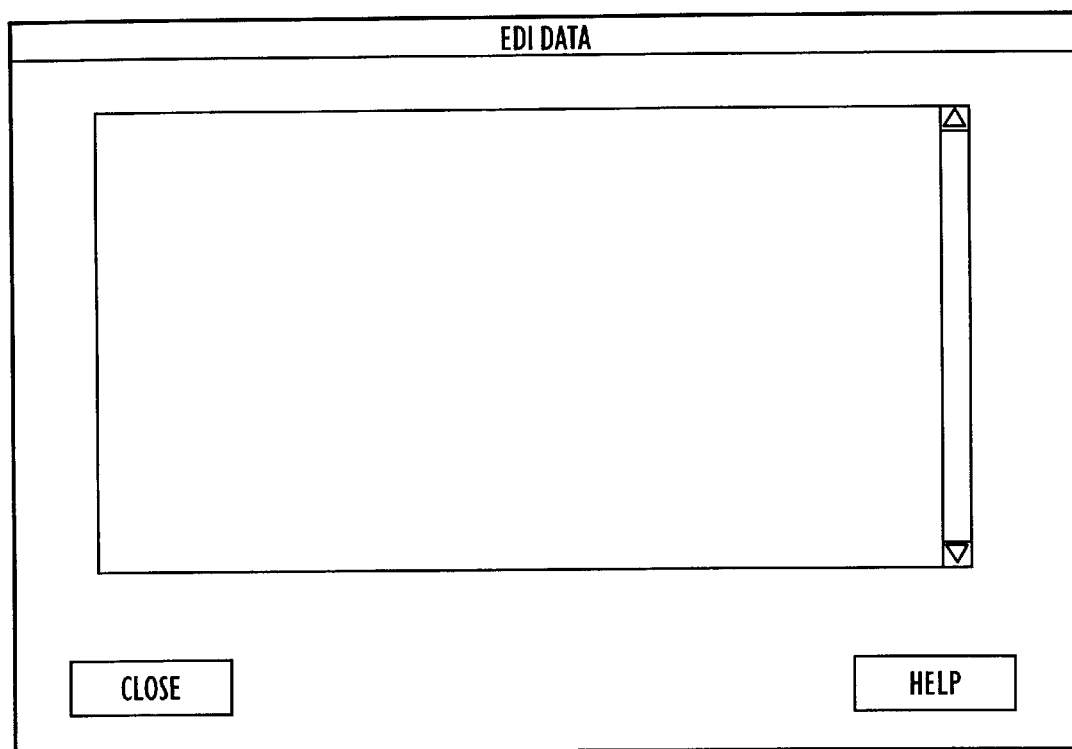

**FIG. 36**

**U.S. Patent**

Sep. 22, 1998

Sheet 39 of 43

**5,812,669**

TRACKING -- SELECT ROWS	
<input type="checkbox"/> START DATE	MM/DD/YY HH:MM:SS
<input type="checkbox"/> END DATE	MM/DD/YY HH:MM:SS
<input type="checkbox"/> START TRACKING #	
<input type="checkbox"/> END TRACKING #	
<input type="checkbox"/> FROM PARTNER	CISCO
<input type="checkbox"/> TO PARTNER	CISCO
MAXIMUM NUMBER OF ROWS	1000
<div>OK</div> <div>CANCEL</div> <div>HELP</div>	

**FIG. 37**

**U.S. Patent**

Sep. 22, 1998

Sheet 40 of 43

**5,812,669**

**VIEW COLUMNS**

**SELECT COLUMN ATTRIBUTES**

DISPLAY	COLUMN NAME

**EDIT COLUMN** ☐ **DISPLAY** **APPLY**

**OK** **CANCEL** **HELP**

**FIG. 38**

**U.S. Patent**

Sep. 22, 1998

Sheet 41 of 43

**5,812,669**

AUDIT LOG			<input type="checkbox"/>	<input type="checkbox"/>
FILE	EDIT	VIEW	HELP	
DATE	TIME	MESSAGE		
MM/DD/YYYY	HH:MM:SS	THIS IS A MESSAGE	△ ▽	
MM/DD/YYYY	HH:MM:SS	THIS IS ANOTHER MESSAGE		
DATE AND TIME: MM/DD/YY HH:MM:SS PROGRAM NAME: XYZ MESSAGE ID: 9999999 MESSAGE: THIS IS THE MESSAGE, ABNORMAL SYSTEM INTERPRETATION. DETAIL MESSAGE: THIS IS THE EXTREMELY LONG DETAIL OF THE ORIGINAL MESSAGE. IT COULD BE SO HUGE THAT IT ACTUALLY DOESN'T, FIT ON THIS SCREEN AT ALL, SO YOU MUST SCROLL DOWN TO SEE THE REST OF IT.			△ ▽	

**FIG. 39**

**U.S. Patent**

Sep. 22, 1998

Sheet 42 of 43

**5,812,669**

AUDIT LOG -- SELECT ROWS	
LOG ROWS TO DISPLAY	
<input type="checkbox"/> START DATE	MM/DD/YY HH:MM:SS
<input type="checkbox"/> END DATE	MM/DD/YY HH:MM:SS
<input type="checkbox"/> PROGRAM NAME	
MAXIMUM NUMBER OF ROWS	1000
OK	CANCEL
HELP	

FIG. 40

VIEW COLUMNS

SELECT COLUMN ATTRIBUTES

DISPLAY	COLUMN NAME

EDIT COLUMN 

☐ DISPLAY

APPLY

OK

CANCEL

HELP

FIG. 41

5,812,669

1

**METHOD AND SYSTEM FOR PROVIDING  
SECURE EDI OVER AN OPEN NETWORK****BACKGROUND OF THE INVENTION****Field of the Invention**

The present invention relates to methods and systems for providing secure EDI over an open system network, such as the INTERNET, and particularly to an improved method and system for providing a secure EDI mailer over an open network which employs an RSA type public/private key encryption scheme in order to deliver secure authentication, and non-repudiation of both origin and receipt.

Public/private key secure communication systems over an open network are well known, such as described in U.S. Pat. Nos. 4,578,531; 4,471,164; 5,268,962; 5,142,577; 4,893,338; 5,222,140; 5,261,002; 5,073,934; 5,303,303; 5,297,208; 5,369,705; 5,351,293; 5,375,169; 5,224,166; 5,253,294; and 5,237,611. The RSA public/private key encryption scheme, is a well-known public key system for providing secure messages over an open network, such as the INTERNET, and is described in various issued United States patents, such as U.S. Pat. Nos. 4,405,829; 4,424,414; 4,200,770; 4,218,582; 5,073,935; and 4,723,284, the contents of which are incorporated by reference herein. In addition, the concept of non-repudiation of origin is known, such as described in U.S. Pat. Nos. 5,226,709; and 5,367,573; as well as such systems in which digital signatures are employed in public/private key systems, such as described in U.S. Pat. Nos. 5,311,591; 5,214,702; 5,337,360; 4,868,877; 5,001,752; 5,005,200; 5,136,643; 5,018,196; 4,885,777; 4,267,782; 5,351,302; 5,208,858; 5,299,263; 5,142,578; 4,987,593; 4,991,210; 5,339,361; 5,373,558; 4,625,076; and the Entrust system marketed by Northern Telecom. Furthermore, various other secure transmission systems have been developed over the years in an attempt to try to provide secure business communications over public or private networks, such as described in U.S. Pat. Nos. 5,369,702; 4,876,716; 5,199,074; 4,823,388; 5,268,962; 5,022,080; 5,136,646; and 5,204,961. Also, the use of electronic data or document interchange or EDI to transmit business communications from peer to peer is known in the art, such as described, by way of example, in U.S. Pat. No. 5,202,977 owned by the assignee herein, or in previously mentioned U.S. Pat. No. 5,337,360. However, applicants are not aware of any successful prior art attempts to use the INTERNET, or any other widely accessible open network, such as telephone lines or any TCP/IP system, in which a secure public key/private key system, such as RSA, has been successfully combined with EDI to provide authentication and non-repudiation of both origin and receipt in a secure peer-to-peer private transaction which can occur at any time over the open network without requiring password management, while also providing verification of message integrity. Such a system eliminates the need for private value-added networks and other third party private networks as well as ensuring the commercial feasibility of a private peer-to-peer business transaction over a widely available open network using EDI. The certainty of non-repudiation and authentication eliminates the ability of either party to deny that the transaction was approved and eliminates doubt as to the contents of the EDI document giving rise to the transaction. The ability of the method and system of the present invention to provide a secure EDI mailer in combination with an RSA type public/private key system overcomes the disadvantages of the prior art.

**SUMMARY OF THE INVENTION**

The method and system of the present invention comprises using the AUTACK or EDI acknowledgement mes-

2

sage as a document to provide the digital signature in a public/private key system in which the AUTACK is signed by an encrypted hash code from the EDI interchange communication which has been encrypted with the sender's private key, such as in an RSA type public/private key system, and is an improvement on such systems. Because the AUTACK or functional acknowledgement is sealed with the private key of the sender of the functional acknowledgement, the recipient of the original message, when the original sender decrypts the reply AUTACK message with the recipient's public key, he is assured that the intended recipient actually sent the reply AUTACK or acknowledgement and of the integrity of the receipt due to the correct hash code being detected.

The EDI AUTACK message, such as the EDIFACT AUTACK message, a generic international standard of EDI for administration, commerce and trade, is preferably used to deliver the desired secure authentication, non-repudiation of origin or receipt, and acknowledgement or denial of acknowledgement for one or more EDI envelopes, such as the X.12 or EDIFACT envelopes, by way of example. In the presently preferred method and system of the present invention, in the process of authentication and non-repudiation of origin, the sender computes a desired hash or message digest from the EDI, such as the MD5 for the entire EDI interchange communication, and inserts the value in the AUTACK message. The sender then preferably computes the MD5 (message digest version 5) of the AUTACK message and digitally signs the AUTACK by encrypting the computed MD5 with the sender's private key, and inserts this value in the AUTACK message. Thus, the AUTACK, or EDI acknowledgement message, is preferably used to provide the signature. The recipient, after receipt of the message, then decrypts the EDI interchange communication, if it is encrypted, and computes the MD5 of the received EDI interchange communication. If non-repudiation of origin is desired, the recipient then decrypts the AUTACK message with the sender's public key. The value obtained by this decryption in this example is the MD5 of the AUTACK message. The MD5 of the AUTACK message is then computed and compared with the decrypted value. If both values are equal, the integrity of the AUTACK is verified and non-repudiation of origin is established. The MD5 of the EDI interchange communication is then compared with the MD5 of the EDI interchange which had been inserted in the AUTACK and if the two are equal, then the integrity of the EDI interchange is verified, and non-repudiation of origin is established.

In order to then establish non-repudiation of receipt, after verifying the integrity and authenticity of the EDI interchange communication received in the manner described above, a new or reply AUTACK is created by populating all segments and elements as appropriate, the computed MD5 is digitally signed with the receiver's private key, the digitally signed MD5 is inserted into the reply AUTACK, appropriate segments of the reply AUTACK are populated, and the prepared reply AUTACK is transmitted to the sender. The original sender, upon receiving this reply AUTACK, then verifies the digital signature from the recipient of his original message by decrypting it with the receiver's public key. The value obtained by this decryption is the MD5 of the received reply AUTACK. The original sender, who has received the reply AUTACK from the recipient of his message, then computes the MD5 of the received reply AUTACK and if the computed MD5 is equal to the decrypted MD5, the integrity of the AUTACK is preserved and non-repudiation of origin of the AUTACK is established. Moreover, if the MD5

5,812,669

3

contained in the particular segment of the AUTACK received where it has been inserted by the sender is equal to the MD5 of the EDI interchange previously transmitted and the acknowledgement is positive, which can be inferred by testing the security code in the AUTACK message, then the following are implicit to establish non-repudiation of receipt: the EDI interchange communication in question is known to both sender and receiver because the MD5 of the EDI interchange communication and the interchange number are contained in the AUTACK message and have been duly recognized, the integrity and authenticity of the EDI interchange communication upon receipt has been verified, and the receiver does not deny having received the EDI interchange communication in question.

The ability to trade or conduct business on a peer-to-peer basis over an open public network, such as the INTERNET, without the need for password management may be controlled, to the extent desired, by the trading participants through the use of trading partner agreements to provide key exchange certification, or by reliance on a certificate authority which issues and verifies public/private key paths. Thus, private and secure transactions, subject to authentication and non-repudiation of both origin and receipt, along with verification of message integrity, using EDI, may be conducted over an open communication network.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a functional flow diagram of the presently preferred method and system of the present invention for providing secure EDI over an open network, such as the INTERNET, in order to provide, integrity, authentication, non-repudiation of origin and recipient, and confidentiality using EDI;

FIG. 2 is a functional flow diagram of the portion of the method and system of FIG. 1 which provides authentication and non-repudiation of origin using the EDIFACT AUTACK message;

FIG. 3 is a functional flow diagram, similar to FIG. 2, of the portion of the method and system of FIG. 1 which provides non-repudiation of recipient using the EDIFACT AUTACK message;

FIG. 4 is a functional flow diagram of the receipt of secure mail over the INTERNET in accordance with the presently preferred method and system of the present invention;

FIG. 5 is a functional flow diagram, similar to FIG. 4, of the sending of secure mail over the INTERNET in accordance with the presently preferred method and system of the present invention;

FIG. 6 is a functional flow diagram, similar to FIG. 4, of trading partner management in accordance with the presently preferred method and system of the present invention;

FIG. 7 is a functional flow diagram, similar to FIG. 4, of audit log management in accordance with the presently preferred method and system of the present invention;

FIG. 8 is a functional flow diagram, similar to FIG. 4, of tracking management in accordance with the presently preferred method and system of the present invention;

FIG. 9 is a functional flow diagram, similar to FIG. 4, of job monitoring in accordance with the presently preferred method and system of the present invention;

FIG. 10 is a functional diagram of the organization of the system employed in carrying out the presently preferred method of the present invention;

FIGS. 11A, 11B, 12, 13A, and 13B comprise a functional flow diagram, similar to FIG. 4, of the overall presently

4

preferred method and system of FIGS. 1–10, with FIG. 11 illustrating certificate verification, FIG. 12 illustrating TPA processing, and FIG. 13 illustrating public key/private key processing;

FIG. 14 is a diagrammatic illustration of a typical computer screen display in accordance with the presently preferred method and system of the present invention, illustrating the various functional options to be controlled by the users to ensure secure mail over the INTERNET in accordance with the presently preferred method and system of the present invention.

FIGS. 15–21 are diagrammatic illustrations, similar to FIG. 14, of typical computer screen displays in accordance with the TRADING PARTNERS PROFILE option in the screen display of FIG. 14;

FIGS. 22–28 are diagrammatic illustrations, similar to FIG. 14, of typical computer screen displays in accordance with the TRADING PARTNER AGREEMENTS option in the screen display of FIG. 14, with FIG. 28 illustrating the OUTBOUND RETRANSMISSION screen display for sending secure E-mail in accordance with the presently preferred method and system of the present invention;

FIGS. 29–33 are diagrammatic illustrations, similar to FIG. 14, of typical computer screen displays in accordance with the KEY MANAGEMENT option in the screen display of FIG. 14; and

FIGS. 34–41 are diagrammatic illustrations, similar to FIG. 14, of typical computer screen displays in accordance with the TRACKING option in the screen display of FIG. 14, with FIGS. 35–38 illustrating tracking interchanges and FIGS. 39–41 illustrating tracking an audit log.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings in detail, and initially to FIG. 1, a functional flow diagram of the presently preferred system 100 of the present invention for providing secure EDI over a conventional open network, such as the commercially available INTERNET 102, is shown. The preferred method and system of the present invention is implemented in a system which is provided under the trademark TEMPLAR owned by the assignee herein. As will be explained in greater detail hereinafter, with reference to FIGS. 2–41, the presently preferred method and system of the present invention provides integrity, authentication, non-repudiation of both origin and receipt, and confidentiality using EDI. This is preferably accomplished by using the AUTACK or EDI (Electronic Data Interchange) acknowledgement message as a document to provide a digital signature in a public/private key system, which is preferably one employing the conventional RSA public/private key encryption scheme, such as the encryption scheme described in U.S. Pat. Nos. 4,405,828; 4,424,414; 4,200,770; and 4,218,582, the contents of which are incorporated by reference herein in their entirety. As will be described in greater detail hereinafter, the AUTACK is preferably sealed or signed with a digital signature which is preferably created by encrypting the MD5 (message digest version 5) of the AUTACK with the originator of the AUTACK's private key, such as the private key of the sender in the preferred process of authentication and non-repudiation of origin illustrated in FIG. 2, or with the private key of the recipient in the preferred process of non-repudiation of receipt illustrated in FIG. 3. The digital signature is then preferably inserted into a predetermined position in the AUTACK and transmitted to the other party to the transaction. Because the AUTACK is

sealed with the private key of the sender of the AUTACK, when the receiver of that AUTACK decrypts the AUTACK with the public key of the sender of that AUTACK, he is assured that the intended recipient of his message actually sent that AUTACK, as well as being assured of the integrity of the receipt due to the correct hash code being detected in the manner to be described hereinafter. In accordance with the present invention, the encrypted secret key used to encrypt the message, as well as the message itself, are contained in the PKCS message.

The MD5 is a conventional value which can be obtained in an EDI message by conventionally hashing a quantity, such as an EDI interchange. There is a very low probability that the MD5 of any two different documents will be the same and, accordingly, the MD5 is preferably used to establish the integrity of EDI interchanges in accordance with the presently preferred method of the present invention.

As is well known by users of EDI, an AUTACK message is an UN/EDIFACT standard for authentication and acknowledgement. In accordance with the presently preferred method and system of the present invention, the AUTACK preferably consists of the USH or security header, USB, USX to identify the message, USY to hold security information on the referred message, USR, and a few other conventional segments normally found in an AUTACK. Preferably, information such as response type, scope of security application, and security function are coded in the USH segment. By way of example, the second element of the USH segment may preferably contain the value 2, or some other designated value, if the AUTACK were to serve as a document verifying non-repudiation of origin with, for example, the fifth field having the value 2, or some other designated value, if an acknowledgement were required. The USX segment preferably contains the interchange number of the EDI interchange in question, thereby linking the referred message to the AUTACK, and the USR segment preferably is a security result holder and contains the digitally signed MD5 of the AUTACK in accordance with the present invention.

As further shown and preferred in FIG. 1, assuming only a two party business transaction between two parties who have entered into a trading partner agreement, each of the parties has a conventional computer workstation 104, 106, such as a RS/6000, HP/9000 and a SOLARIS; a conventional EDI translator 108, 110; a conventional integrated software/hardware server 112, 114, which has been programmed to operate in accordance with the preferred method and system of the present invention, and which includes conventional computer display terminals 116, 118, capable of operating in a Microsoft WINDOWS or UNIX X-WINDOWS type environment, for displaying messages and choices in accordance with the preferred method of the present invention as well as messages and documents transmitted via EDI over the INTERNET network 102 in carrying out the method of the present invention, with the servers 112, 114 being capable of providing the desired authentication, integrity, non-repudiation of origin and receipt, and confidentiality in accordance with the present invention. As shown and preferred, the servers 112, 114 conventionally communicate over the open network, such as the INTERNET 102, through a heterogeneous mail environment 120, 122, such as one employing SMPT/MIME, X400/X435, LOTUS NOTES/cc:MAIL, and/or MICROSOFT MAIL/EXCHANGE. The server 112, 114 are preferably conventional computers, which have been conventionally programmed in C++, to carry out the presently preferred method of the present invention, and are preferably targeted

to run on on one of the following UNIX platforms: AIX, HPUNIX, SUN OS, or SOLARIS.

Enumerated below in TABLE A are the various scripts which may be readily used by a programmer of ordinary skill in the art to create the necessary programming in C++, which is an object oriented programming language, to run on the servers 112, 114 to carry out the presently preferred method of the present invention. As will be noted, the various scripts relate to sending an EDI document, re-sending an EDI document, receiving a valid EDI document, receiving an acknowledgement AUTACK, receiving a trading partner's new public key, distributing your new public key to related trading partners, activating the certificate management main menu, creating your own private/public key pair, changing a certificate (your own public/private key pair), removing your own private/public key pair, copying your own public key to disk file, printing your own public key certificate, saving your own private/public key to disk file, restoring your own private/public key from disk file to replace the existing private/public key, restoring your own private/public key from disk file to a new key, activating the trading partner public key management main menu, adding a trading partner public key, changing the trading trading partner public key, removing the trading partner public key, copying the trading partner public key from disk file to replace the existing trading partner public key, copying the trading partner public key from disk file to a new key.activating the trading partner agreement management main menu, adding trading partner agreement, changing the trading partner agreement, removing the trading partner agreement, copying the trading partner agreement to disk file, copying the trading partner agreement from disk file, MIME packaging (conventional MIME mailer), MIME unpackaging, PKCS packaging (conventional PKCS), PKCS unpackaging, working with the tracking record, monitoring server jobs, receiving an invalid EDI document with an integrity problem, receiving an AUTACK with an integrity problem, receiving unsupported mail, receiving an EDI interchange without AUTACK while non-repudiation of origin is expected, and receiving an unexpected AUTACK.

TABLE A

Scripts		
Initiator	Action	Participant
Send an EDI document		
EDI translator	Request to send an EDI batch	authentication agent
authentication agent	Get sender and receiver ID envelop	EDI interchange
authentication agent	Create a tracking record	tracking record
authentication agent	Create an event begin log entry	audit log
authentication agent	Request digest calculation method and trading partner's destination address, source address, method of non-repudiation of receipt (NRR), non-repudiation of origin (NRO), confidentiality and transfer	trading partner agreement
authentication agent	Get identification digest	EDI interchange
EDI interchange	Get identification digest method	configuration
EDI interchange	Calculate digest of the EDI interchange	digest calculator

5,812,669

7

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
authentication agent	Verify the control number and identification digest is unique	tracking list
authentication agent	Create AUTACK	AUTACK
AUTACK	Get the private key ID, NRR, NRO, integrity check, digest method	trading partner agreement
AUTACK	Get the private key	key directory
AUTACK	Get integrity digest	EDI interchange
AUTACK	Calculate own digest	digest calculator
AUTACK	Sign the digest of the AUTACK	BSAFE
authentication agent	Create AUTACK envelop	UNB envelop
authentication agent	Encrypt the EDI interchange	PKCS
authentication agent	Combine the EDI interchange and AUTACK into one MIME encoded mail body (multiple MIME partials)	MIME packager
authentication agent	Send the encoded interchange to trading partner	sendmail
authentication agent	Update the tracking record with send date and time, location of the mail body, sender and receiver ID, NRO and integrity digest, private key ID, public key ID, identification digest	tracking record
authentication agent	Create a mail sent log entry	audit log
authentication agent	Return a success return code and tracking record ID to EDI translator	authentication agent
<u>Re-Send an EDI document</u>		
re-transmit monitor	Request the acknowledge status	tracking record
re-transmit monitor	Request re-transmit action	trading partner agreement
re-transmit monitor	Request to re-send the EDI interchange	authentication agent
authentication agent	Request the location of the mail body	tracking record
authentication agent	Send the encoded interchange to trading partner	sendmail
authentication agent	Update the tracking record with re-send date and time	tracking record
authentication agent	Create a mail re-sent log entry	audit log
<u>Receive a valid EDI document</u>		
MIME packager	Inform mail arrival	MIME packager
authentication agent	Create a mail received successfully log entry	audit log
authentication agent	Validate the received mail contained an EDI interchange	EDI interchange
authentication agent	Create a tracking record	tracking record
authentication agent	Get sender and receiver ID	EDI interchange envelop
authentication agent	Get trading partner agreement with sender and receiver ID	trading partner agreement
authentication agent	Get the digest of the interchange and signed digest, and digest calculation method	AUTACK
AUTACK	Get the public key ID	trading partner agreement
AUTACK	Get the public key of the trading partner	key directory
key directory	Read the latest effective public key	key directory
AUTACK	Decrypt the signed digest	BSAFE
authentication agent	Calculate digest of the EDI interchange	EDI interchange
authentication agent	Compare the calculated digest of the EDI interchange with the digest in	AUTACK

8

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
	the AUTACK, verify the digest of the partial AUTACK same as the decrypted signed digest in the AUTACK	
authentication agent	Get identification digest	EDI interchange
EDI interchange	Get identification digest method	configuration
EDI interchange	Calculate digest of the EDI interchange	digest calculator
authentication agent	Verify the control number and identification digest is unique	tracking list
authentication agent	Create an EDI interchange received successfully log entry	audit tog
authentication agent	Get the non-repudiation of receipt flag	trading partner agreement
authentication agent	Create an acknowledge AUTACK, control number	AUTACK
AUTACK	Get the private key ID	trading partner agreement
AUTACK	Get the private key	key directory
authentication agent	Sign the digest	BSAFE
authentication agent	Create an AUTACK send request log entry	audit log
authentication agent	Create an AUTACK MIME encoded mail body	MIME packager
authentication agent	Send the encoded AUTACK to trading partner	sendmail
authentication agent	Update the tracking record with AUTACK send date and time, location of the mail body, sender and receiver ID digest	tracking record
authentication agent	Create an AUTACK sent log entry	audit log
authentication agent	Get inbound routing post-processing action	trading partner agreement
authentication agent	Write EDI data to specified file or directory	authentication agent
authentication agent	Execute post-processing command (e.g. invoke EDI translator)	authentication agent
<u>Receive an acknowledgement AUTACK</u>		
MIME packager	Inform mail arrival	MIME packager
authentication agent	Get list of MIME body parts	MIME packager
authentication agent	Validate the received mail contained an AUTACK	AUTACK interchange
authentication agent	Get sender and receiver ID	AUTACK interchange envelope
authentication agent	Get NRR flag, public key ID	Trading partner agreement
authentication agent	Verify the sender's signature	BSAFE
authentication agent	Get interchange control number and integrity digest	AUTACK
authentication agent	Update acknowledge received date and time of the sent interchange	tracking record
<u>Receive a trading partner's new public key</u>		
MIME packager	Inform mail arrival	MIME packager
authentication agent	Get list of MIME body parts	MIME packager
authentication agent	Validate the received mail contained a certificate	certificate
authentication agent	Get distinguish name, qualifier and ID of the trading partner	certificate
authentication agent	Get e-mail address of certificate management staff, public key	key directory
authentication agent	Verify the signature	BSAFE
authentication agent	Log certificate arrival	audit log

5,812,669

9

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
authentication agent	Create a tracking record with type certificate	tracking record
authentication agent	Inform the user the arrival of the certificate	authentication agent
User	Verify with trading partner that the certificate is correct	User
User	Select to update the certificate from the tracking record	User
UI	Get the certificate	tracking record
UI	Add the certificate with new serial number	key directory
UI	Change the expired date of previous certificate	key directory
UI	Log certificate update	audit log
UI	Change the status of the tracking record to updated	tracking record
<u>Distribute new own public key to related trading partners</u>		
User	Invoke certificate management button	User
UI	Get a list of key pair - key ID	key directory
UI	Display the list of key pair on screen	UI
User	Select the certificate to distribute	User
User	Invoke the distribution function	User
UI	Get a list of trading partner using that certificate	trading partner agreement
UI	Get the e-mail address of the trading partner	trading partner
UI	Display the list of trading partner and e-mail address	UI
User	Select or de-select trading partner	User
User	Change the e-mail address	User
User	Add a new e-mail address	User
User	Invoke the distribution process	User
UI	Create the certificate (X.509 or PKCS?)	key directory
UI	Encode the certificate in MIME format	MIME packager
UI	Send the MIME encode certificate	sendmail
UI	Create a key sent log entry	audit log
<u>Activate certificate management main menu</u>		
User	Invoke certificate management button	User
UI	Get a list of key pair - key ID	key directory
UI	Display the list of key pair on screen	UI
<u>Create own private/public key pair</u>		
The user needs to logon and activate certificate management main menu before get to this function.		
User	Invoke create key pair button	User
UI	Display a screen to accept key ID, effective date, distinguished name and e-mail address	UI
User	Key in the key ID, effective date, name and e-mail address	User
UI	Create key pair	key directory
key directory	Get length of the key	configuration
key directory	Get key generation seed	seed generator
key directory	Generate private and public key pair	BSAFE
key directory	Ensure the public key does not exist	key directory database
key directory	Get internal encryption key	configuration
key directory	Encrypt the private key	BSAFE
key directory	Assign 1 to the serial number	key directory database
key directory	Write the key pair	key directory database
key directory	Return the key pair	key directory
UI	Update key list	UI
<u>Change certificate (own private/public key pair)</u>		
The user needs to logon and activate certificate management main menu before get to this function.		
User	Select a key pair for change	User
User	Invoke change certificate button	User
UI	Display a screen to change effective date, name and e-mail address	User
User	Change fields	User

10

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
User	Invoke the create new key button	User
UI	Re-generate the key pair	key directory
key directory	Assign new serial number	key directory
key directory	Get key generation seed	seed generator
key directory	Get length of key	configuration
key directory	Generate private and public key pair	BSAFE
key directory	Ensure the public key does not exist	key directory database
key directory	Get internal encryption key	configuration
key directory	Encrypt the private key	BSAFE
key directory	Write the new key pair	key directory database
key directory	Return the key pair	key directory
UI	Update key list	UI
<u>Remove own private/public key pair</u>		
The user needs to logon and activate certificate management main menu before get to this function.		
User	Select a key pair for removal	User
User	Invoke remove key pair button	User
UI	Check whether the key pair is used in any trading partner agreement	trading partner agreement
UI	Display the confirmation message	UI
User	Confirm to remove the key pair	User
UI	Remove the key pair	key directory
key directory	Deactivate the key pair	key directory database
UI	Mark the key pair as deactivated on screen	UI
<u>Copy own public key to disk file</u>		
The user needs to logon and activate certificate management main menu before get to this function.		
User	Select a key	User
User	Invoke the copy to disk function	User
UI	Display a screen to prompt for the output file name	UI
User	Key in the file name	User
UI	Display a replacement confirmation screen	UI
User	Select to overwrite the existing file	User
UI	Output the certificate in X.509 format to disk file	key directory
UI	Display a completion message	UI
UI	Redisplay the list	UI
<u>Print own public key certificate</u>		
The user needs to logon and activate certificate management main menu before get to this function.		
User	Select a key	User
User	Invoke the print certificate function	User
UI	Get the human readable formatted certificate	key directory
key directory	Format the distinguished name, public key, effective date, reference (key ID), serial number, signature algorithm, certificate signature, version, issuer and e-mail address	key directory
UI	Output the certificate to the system default printer	UI
UI	Redisplay the list	UI
<u>Save own private/public key to disk file</u>		
The user needs to logon and activate certificate management main menu before get to this function.		
User	Select a key	User
User	Invoke the save to disk function	User
UI	Display a screen to prompt for the output file name	UI
User	Key in the file name	User
UI	Display a replacement confirmation screen	UI
User	Select to overwrite the existing file	User

5,812,669

11

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
UI	Output the key pair - distinguished name, private, public key, effective date, reference (key ID), serial number, digest algorithm, digest, version, issuer and e-mail address to file	key directory
UI	Display a completion message	UI
UI	Redisplay the list	UI
Restore own private/public key from disk file to replace the existing The user needs to logon and activate certificate management main menu before get to this function.		
User	Select a key	User
User	Invoke the restore from disk function	User
UI	Display a screen to prompt for the input file name	UI
User	Key in the file name	User
UI	Display a replacement confirmation and save the key pair screen	UI
User	Select to overwrite the existing key and key in the save file name	User
UI	Create a log entry	audit log
UI	Output the existing key pair - distinguished name, private, public key, effective date, reference (key ID), serial number, digest algorithm, digest, version, issuer and e-mail address to the save file	key directory
UI	Replace the key pair	key directory
key directory	Read in the key information from the file	key directory
key directory	Update the key information	database
UI	Display a completion message	UI
UI	Redisplay the list	UI
Restore own private/public key from disk file to a new key The user needs to logon and activate certificate management main menu before get to this function.		
User	Invoke the restore from disk function	User
UI	Display a screen to prompt for the key ID and input file name	UI
User	Key in the key ID and file name	User
key directory	Read in the key information from the file	key directory
key directory	Calculate the certificate digest	digest calculator
key directory	Verify the digest match	key directory
key directory	Write the key information	database
UI	Add the key pair to the list	UI
UI	Redisplay the list	UI
Activate trading partner public key management main menu		
User	Invoke trading partner key button	User
UI	Get a list of trading partner public key	key directory
UI	Display the list of trading partner public keys on screen	UI
Add trading partner public key The user needs to logon and activate trading partner public certificate management main menu before get to this function.		
User	Invoke the add trading partner public key button	User
UI	Display add trading partner public key screen	UI
User	Select to add the key from a disk file	User
UI	Display a screen for keying in the file name	UI
User	Key in the file name	User
UI	Read in the e-mail address, effective date, public key, phone number, street address	public key file
UI	Display the public key	UI

12

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
5 User	Key in the trading partner company name	User
UI	Display the new public key in the list on screen	UI
10 Change trading partner public key	The user needs to logon and activate trading partner public certificate management main menu before get to this function.	
User	Select a public key for change	User
User	Invoke the change public key button	User
UI	Get the public key informatoin	key directory
15 UI	Display trading partner public key on screen	UI
User	Change the effective date and public key	User
UI	Update the public key	key directory
20 UI	Add the new public key with new serial number	key directory
UI	Display the new public key in the list on screen	UI
Remove trading partner public key The user needs to logon and activate trading partner public certificate management main menu before get to this function.		
25 User	Select a public key for removal	User
User	Invoke the remove public key button	User
UI	Get the public key informatoin	key directory
UI	Display add trading partner public key screen	UI
30 UI	Display the confirmation screen	UI
User	Confirm the removal	User
UI	Deactivate the public key	key directory
UI	Remove the public key from the list on screen	UI
Copy trading partner public key from disk file to replace the existing The user needs to logon and activate certificate management main menu before get to this function. Assume the file is in X.509 format.		
35 User	Select a public key	User
User	Invoke the restore from disk function	User
UI	Display a screen to prompt for the input file name	UI
40 User	Key in the file name	User
UI	Display a replacement confirmation and save the key pair screen	UI
User	Select to overwrite the existing key and key in the save file name	User
UI	Create a log entry	audit log
45 UI	Output the existing key - distinguished name, public key, effective date, reference (key ID), serial number, digest algorithm, digest, version, issuer and e-mail address to the save file	key directory
50 UI	Replace the key	key directory
key directory	Read in the key information from the file	key directory
key directory	Update the key information	database
UI	Display a completion message	UI
UI	Redisplay the list	UI
55 Copy trading partner public key from disk file to a new key	The user needs to logon and activate certificate management main menu before get to this function. Assume the file is in X.509 format.	
User	Invoke the restore from disk function	User
UI	Display a screen to prompt for the key ID and input file name	UI
60 User	Key in the key ID and file name	User
key directory	Read in the key information from the file	key directory
key directory	Calculate the certificate digest	digest calculator
key directory	Verify the digest match	key directory
key directory	Write the key information	database
65 UI	Add the key to the list	UI
UI	Redisplay the list	UI

5,812,669

13

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
<u>Activate trading partner agreement management main menu</u>		
User	Invoke trading partner agreement button	User
UI	Get a list of trading partner agreement	trading partner agreement list
UI	Display the list of trading partner agreement on screen	UI
<u>Add trading partner agreement</u>		
The user needs to logon and activate trading partner management main menu before get to this function.		
User	Invoke the add trading partner agreement button	User
UI	Display trading partner agreement screen to accept local trading partner and certificate ID; remote trading partner and certificate ID	UI
User	Invoke add new local trading partner	User
UI	Display an add trading partner screen	UI
User	Key in name, contact, contact e-mail address, phone fax, address, full name, comment	User
UI	Verify the trading partner does not exist	trading partner list
UI	Add the trading partner	trading partner list
UI	Display the local trading partner on screen	UI
User	Key in envelop type, seperators, qualifier and ID	User
User	Invoke add new remote trading partner	User
UI	Display an add trading partner screen	UI
User	Key in name, contact, contact e-mail address, phone, fax, address, full name, comment	User
UI	Verify the trading partner does not exist	trading partner list
UI	Add the trading partner	trading partner list
UI	Display the remote trading partner on screen	UI
User	Invoke the inbound routing button	User
UI	Display inbound routing information screen	UI
User	Key in inbound information-status; security - NRO, NRR, and confidential; file to receive EDI data: command to run after receiving	User
UI	Verify inbound routing information	inbound routing
UI	Add inbound routing	inbound routing
User	Invoke the outbound routing button	User
UI	Display outbound routing information screen	UI
User	Key in transport information - MIME receiver and sender e-mail address, maximum message size, character set	User
User	Key in security - NRO, NRR, confidential	User
User	Key in re-transmission interval and action	User
UI	Verify outbound routing information	outbound routing
UI	Acid outbound routing	outbound routing
UI	Re-display the trading partner agreement main screen	UI
User	Select to save the trading partner agreement	User
UI	Add the trading partner agreement	trading partner agreement list
<u>Change trading partner agreement</u>		
The user needs to logon and activate trading partner management main menu before get to this function.		

14

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
User	Select trading partner agreement for change	User
User	Invoke the change trading partner agreement button	User
10 UI	Get the selected trading partner agreement	trading partner agreement list
UI	Get information - local and remote trading partner, inbound and outbound information	trading partner agreement
UI	Display trading partner agreement information on screen and do not allow to change the local and remote trading partner	UI
15 User	Request to change the local trading partner information	User
UI	Get information about the local trading partner	trading partner
20 UI	Display the trading partner information on screen	UI
User	Change e-mail address of the trading partner	User
UI	Update the trading partner	trading partner
UI	Display the trading partner agreement screen	UI
25 User	Select to change remote the trading partner	UI
UI	Get information about the remote trading partner	trading partner
UI	Display the trading partner information on screen	UI
30 UI	Display the trading partner agreement screen	UI
User	Change the address of the trading partner	User
UI	Update the trading partner	trading partner
35 UI	Display the trading partner agreement screen	UI
User	Change the inbound and outbound routing information	User
User	Select to update the trading partner agreement	User
40 UI	Update the trading partner agreement	trading partner list
<u>Remove trading partner agreement</u>		
The user needs to logon and activate trading partner management main menu before get to this function.		
45 User	Select a trading partner agreement for removal	User
User	Invoke the remove trading partner agreement button	User
UI	Get the selected trading partner agreement	trading partner agreement list
UI	Get information - local and remote trading partner	trading partner agreement
50 UI	Display trading partner agreement information on screen	UI
UI	Display the confirmation screen	UI
User	Confirm removal	User
UI	Remove trading partner agreement	trading partner agreement list
55 UI	Remove the agreement from the list on screen	UI
UI	Redisplay the new list on screen	UI
<u>Copy trading partner agreement to disk file</u>		
The user needs to logon and activate trading partner agreement main menu before get to this function.		
60 User	Select a trading partner agreement	User
User	Invoke the copy to disk function	User
UI	Display a screen to prompt for the output file name	UI
User	Key in the file name	User
65 UI	Display a replacement confirmation screen	UI

5,812,669

15

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
User	Select to overwrite the existing file	User
UI	Output the trading partner agreement to file as a flat file	trading partner agreement
UI	Display a completion message	UI
UI	Redisplay the list	UI
Copy trading partner agreement from disk file The user needs to logon and activate trading partner agreement main menu before get to this function.		
User	Invoke the copy from disk function	User
UI	Display a screen to prompt for the input file name	UI
User	Key in the file name	User
UI	Display a replacement confirmation screen	UI
User	Select to overwrite the existing trading partner agreement	User
UI	Replace the trading partner agreement	trading partner agreement
trading partner agreement	Read in the trading partner agreement information from the file	trading partner agreement
trading partner agreement	Update the trading partner agreement information	database
UI	Display a completion message	UI
UI	Redisplay the list	UI
<u>MIME packaging</u>		
authentication agent	Create a MIME Object with EDI interchange, AUTACK, trading partner agreement	MIME packager
MIME packager	Get Sender's and Receiver's Qualifier and ID	EDI interchange
MIME packager	Get From and To e-mail address, maximum MIME partial size	trading partner agreement
MIME packager	Get trading partner security - encryption method (e.g. DES or RC4), trading partner public key ID, confidentiality flag	trading partner agreement
MIME packager	Envelope EDI interchange in PKCS envelope	PKCS enveloper
MIME packager	Create EDI body part for the PKCS-ed EDI interchange	MIME body part
MIME packager	Create AUTACK body part	MIME body part
MIME packager	Create MIME header - From and To e-mail address	MIME header
MIME packager	Create MIME-partials from MIME header and body parts	MIME message
MIME packager	Return the MIME message to authentication agent	MIME
<u>MIME unpackaging</u>		
sendmail	Create MIME partial instance	MIME packager
MIME packager	Log partial arrival	audit log
MIME packager	Assemble partials	MIME packager
MIME packager	Log all partials received	audit log
MIME packager	Unwrap PKCS-ed body part	PKCS de-enveloper
MIME packager	Inform authentication agent	MIME packager
mail arrival	Get From and To e-mail address	MIME packager
authentication agent	Get TP security	trading partner agreement
authentication agent	Get list of body parts	MIME message
authentication agent	Get AUTACK body part	MIME message
authentication agent	Get EDI interchange	MIME message

16

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
authentication agent	Continue with other processing	authentication agent
<u>PKCS packaging</u>		
MIME packager	Create a PKCS-ed EDI interchange	PKCS packager
PKCS packager	Get sender's and receiver's qualifier and ID	EDI interchanger
PKCS packager	Get trading partner's public key ID and encryption method (e.g. DES or RC4)	Trading partner agreement
PKCS packager	Get trading partner's public key	key directory
PKCS packager	Get random DES key	DES encryptor
PKCS packager	Encrypt the EDI interchange	DES encryptor
PKCS packager	Encrypt the DES key	BSAFE
PKCS packager	Create the PKCS-ed MIME body part with the encrypted DES key and EDI interchange	MIME body part
<u>PKCS unpackaging</u>		
PKCS packager	Return the PKCS-ed EDI interchange	PKCS packager
MIME packager	Unwrap a PKCS-ed body part	PKCS packager
PKCS packager	Get trading partner's public key ID	trading partner agreement
PKCS packager	Get trading partner's public key	key directory
PKCS packager	Match the certificate in the envelope to the certificate in the key directory	trading partner's public key
PKCS packager	Get the PKCS-ed EDI interchanger	PKCS-ed body part
PKCS packager	Decrypt the DES key	BSAFE
PKCS packager	Decrypt the encrypted EDI interchange	DES encryptor
PKCS packager	Return the EDI interchanger to MIME packager	PKCS packager
<u>Work with tracking record</u>		
User	Invoke work with tracking record function	User
UI	Prompt for selection criteria - date range, sender/receiver, tracking record ID, status, data type, interchange control number (data type sensitive and only apply to EDI data)	UI
User	Key in criteria e.g. date range	User
UI	Get a list of tracking records which are within the specified date range	tracking record
tracking record	Query database	database
UI	Display a list of tracking records	UI
User	Invoke view detail of an EDI batch	User
UI	Get detail	tracking record
UI	Display the detail of the EDI batch	UI
User	Invoke the retransmission of an interchange	User
UI	Retransmit the interchange	authentication agent
UI	Redisplay the detail	UI
User	Close	User
UI	Redisplay the list of tracking record	UI
User	Select to retransmit an EDI batch	User
UI	Retransmit of the batch	authentication agent
UI	Redisplay the list of tracking record	UI
User	Reprocess an outbound batch	User
60 UI	Reprocess an outbound batch (start from beginning)	authentication agent
UI	Redisplay the list of tracking record	UI
User	Reprocess an inbound batch	User
UI	Reprocess an inbound batch (start from beginning)	authentication agent
65 UI	Redisplay the list of tracking record	UI
User	Continue from last action	User

5,812,669

17

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
UI	Continue last action	authentication agent
authentication agent	Get status	tracking record
authentication agent	Continue process according to the status	authentication agent
UI	Redisplay the list of tracking record	UI
User	Repeat last action of a success inbound batch i.e. retranslate	User
UI	Repeat last action	authentication agent
authentication agent	Get Status	tracking record
authentication agent	Repeat last action	authentication agent
UI	Redisplay the list of tracking record	UI
User	Select to print a group of tracking record	User
UI	Get tracking record summary information	tracking record
UI	Format the report	UI
UI	Print the report	printer
UI	Redisplay the list of tracking record	UI
User	Release a hold EDI batch	User
UI	Change the status of the tracking record to release	tracking record
UI	Process the EDI batch	authentication agent
UI	Redisplay the list of tracking record	UI
User	Select to display the content of a received mail.	User
UI	Get the mail content	tracking record
tracking record	Get the mail content	mail file
UI	Display the mail	UI
User	Close	User
UI	Redisplay the list of tracking record	UI
<u>Monitor server jobs</u>		
User	Invoke work with monitor server jobs function	User
UI	Get server jobs information	operating system on the server
UI	Display the server job name, status	UI
User	Select to refresh the status	User
UI	Get server jobs information	operating system on the server
UI	Display the server job name, status	UI
User	Select to start a server job e.g. guardian	User
UI	Start the server job	job configuration
job configuration	Start the job	operating system on the server
UI	Get server jobs information	operating system on the server
UI	Display the server job name, status	UI
Receive an invalid EDI document with integrity problem		
Assume that the beginning of the script is same as the Receive a Valid EDI Document. After verifying the digest of the partial AUTACK same as the decrypted signed digest in the AUTACK, the Authentication Agent finds out that the digest in the AUTACK does not match the digest of the EDI interchange.		
authentication agent	Create an interchange integrity error log with following information: digest in AUTACK, digest of the EDI interchange, AUTACK control number, interchange control number, trading partner name, tracking record ID.	audit log
authentication agent	Update the status of the tracking record to interchange integrity error	tracking record
authentication agent	Get local e-mail address	trading partner agreement

18

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
authentication agent	Format an interchange integrity error e-mail with following information: time stamp, digest in AUTACK, digest of the EDI interchange, AUTACK control number, interchange control number, trading partner name, tracking record ID.	authentication agent
authentication agent	Send the e-mail	sendmail
authentication agent	Get EDI interchange creation date and time	EDI interchange
authentication agent	Format a negative AUTACK - the digest in the received AUTACK	AUTACK
authentication agent	Create an AUTACK interchange	AUTACK interchange
authentication agent	Encode the negative AUTACK in MIME format	MIME packager
authentication agent	Send the encoded negative AUTACK to trading partner	sendmail
authentication agent	Update the status of the tracking record to interchange integrity error with negative AUTACK sent	tracking record
authentication agent	Log the negative AUTACK sent event	audit log
Receive an AUTACK with integrity problem		
Assume that the beginning of the script is same as the Receive A Valid EDI Document. The Authentication Agent finds out that the digest of the partial AUTACK is not same as the decrypted signed digest in the AUTACK.		
authentication agent	Create an AUTACK integrity error log with following information: signed digest of the partial AUTACK in AUTACK, decrypted signed digest of the partial AUTACK in AUTACK, calculated digest of the partial AUTACK, AUTACK control number, trading partner name, trading partner's public key, tracking record ID.	audit log
authentication agent	Update the status of the tracking record to AUTACK integrity error	tracking record
authentication agent	Get local e-mail address	trading partner agreement
authentication agent	Format an AUTACK integrity error e-mail with following information: time stamp, signed digest of the partial AUTACK in AUTACK, decrypted signed digest of the partial AUTACK in AUTACK, calculated digest of the partial AUTACK, AUTACK control number, trading partner name, trading partner's public key, tracking record ID.	authentication agent
authentication agent	Send the e-mail	sendmail
Receive unsupported mail		
Assume that the beginning of the script is same as the Receive a Valid EDI Document. The Authentication Agent finds out that the mail is not an EDI document, not an AUTACK, and not a certificate.		
authentication agent	Dump the unsupported mail to a file.	dump file
dump file	Get the dump file directory	configuration
dump file	Generate an unique dump file name	dump file
dump file	Output the unsupported mail to the dump file	dump file
authentication agent	Create a received unsupported mail error log with following information: sender and receiver e-mail address, subject, e-mail message ID, dump file name.	audit log

5,812,669

19

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
authentication agent	Update the status of the tracking record to received unsupported mail, save the dump file name.	tracking record
authentication agent	Get local e-mail address	trading partner agreement
authentication agent	Format a received unsupported mail error e-mail with following information: sender and receiver e-mail address, subject, e-mail message ID, dump file name	authentication agent
authentication agent	Send the e-mail.	sendmail
Receive an EDI interchange without AUTACK while non-repudiation of origin is expected Assume that the beginning of the script is same as the Receive a Valid EDI Document. The Authentication Agent finds out that there is no AUTACK in the mail.		
authentication agent	Dump the EDI interchange to a file	dump file
dump file	Get the dump file directory	configuration
dump file	Generate an unique dump file name	dump file
dump file	Output the EDI interchange to the dump file	dump file
authentication agent	Create an AUTACK not received error log with following information: time stamp, interchange control number, trading partner name, tracking record ID, dump file name.	audit log
authentication agent	Update the status of the tracking record to AUTACK not received, save the dump file name	tracking record
authentication agent	Get local e-mail address	trading partner agreement
authentication agent	Format an AUTACK not received error e-mail with following information: time stamp, interchange control number, trading partner name, tracking record ID, dump file name.	authentication agent
authentication agent	Send the e-mail	sendmail
Receive an unexpected AUTACK Assume that the beginning of the script is same as the Receive a Valid EDI Document. The Authentication Agent finds out that there is an AUTACK in the mail but the trading partner agreement specifies no non-repudiation of origin.		
authentication agent	Dump the EDI interchange to a file	dump file
dump file	Get the dump file directory	configuration
dump file	Generate an unique dump file name	dump file
dump file	Output the EDI to the dump file	dump file
authentication agent	Dump the AUTACK interchange to a file	dump file
dump file	Get the dump file directory	configuration
dump file	Generate an unique dump file name	dump file
dump file	Output the AUTACK to the dump file	dump file
authentication agent	Create an unexpected AUTACK error log with following information: time stamp, interchange control number, trading partner name, tracking record ID, dump file names	audit log
authentication agent	Update the status of the tracking record to unexpected AUTACK, save the dump file names	tracking record
authentication agent	Get local e-mail address	trading partner agreement
authentication agent	Format an unexpected AUTACK error e-mail with following information: time stamp, interchange control number, trading partner name, tracking record ID, dump file names	authentication agent

20

TABLE A-continued

<u>Scripts</u>		
Initiator	Action	Participant
authentication agent	Send the e-mail	sendmail

FIGS. 14-41 illustrate the various screen displays, in a conventional WINDOWS type environment, that are capable of being preferably provided on the typical computer screens 116, 118 associated with the servers 112, 114 in carrying out the above method under control of the program which is based on the scripts of TABLE A. In this regard, FIG. 14 illustrates the overall screen display which is presented to the parties on the network who are eligible to participate in peer to peer, computer to computer, business EDI transactions through the INTERNET. As shown by way of example in FIG. 14, the user may be presented, by way of example, with the choice to select windows for TRADING PARTNER PROFILES, TRADING PARTNER AGREEMENTS, KEY MANAGEMENT, and TRACKING in the conventional WINDOWS environment which is preferably employed.

FIGS. 15-21 illustrate various computer screen displays which the user may be presented with after selecting the TRADING PARTNER PROFILES window in the screen display of FIG. 14. FIG. 15 represents a scenario of three possible trading partners identified as CISCO, SEARS, and ME, where ME represents the user himself. FIG. 16 illustrates a possible dialog box for creating the trading partner profile directly on the computer screen 116, 118. Similarly, FIG. 17 illustrates a possible dialog box for creating contact information for the trading partner directly on the computer screen 116, 118. FIG. 18 illustrates a possible dialog box for creating EDI qualifier information directly on the computer screen 116, 118. FIG. 19 illustrates a possible dialog box for trading partner bound keys which are displayed and may be changed directly on the computer screen 116, 118, with two options for BIND and UNBIND being shown. FIG. 20 illustrates the computer screen display 116, 118 when the BIND KEYS option has been selected in the display of FIG. 19 in order to bind a particular key to a particular trading partner. FIG. 21 illustrates the computer screen display 116, 118 for KEY ADDENDUM for, by way of example, displaying a formatted certificate which may be bound to the trading partner along with the key.

FIGS. 22-28 illustrate various computer screen displays which the user may be presented with after selecting the TRADING PARTNER AGREEMENTS window in the screen display of FIG. 14. FIG. 22 represents a scenario of the same three trading partners as identified in FIG. 15. FIG. 23 illustrates a dialog box for creating, in the above example, a trading partner agreement between the user ME, which is the local ID, and SEARS, which is the remote ID, directly on the computer screen 116, 118. FIG. 24 illustrates a dialog box for creating the inbound routing instructions for the trading partner agreement directly on the computer screen 116, 118. Similarly, FIGS. 25-27 illustrate various dialog boxes for creating the outbound routing instructions for the trading partner agreement directly on the computer screen 116, 118. FIG. 28 illustrates a dialog box for selecting the outbound retransmission directly on the computer screen 116, 118.

FIGS. 29-33 illustrate various computer screen displays which the user may be presented with after selecting the

5,812,669

21

KEY MANAGEMENT window in the screen display of FIG. 14. FIG. 29 again represents a scenario of the same three trading partners as presented in FIG. 15. FIG. 30 illustrates a possible dialog box associated with the local key ID, FIG. 31 illustrates a possible dialog box associated with the remote key ID, FIG. 32 illustrates a possible dialog box associated with key details, and FIG. 33 illustrates a possible dialog box associated with export of the public key to another file.

FIGS. 34-41 illustrate various computer screen displays which the user may be presented with after selecting the TRACKING window in the screen display of FIG. 14. FIG. 34 illustrates a screen display on the computer screen 116, 118 in which two EDI messages have been sent, one between SEARS and CISCO, and one between ME and THEM, by way of example. FIG. 35 illustrates a possible display on the computer screen 116, 118 of the interchanges between the trading partners and shows the non-repudiation of receipt AUTACK, illustrating the AUTACK status on the computer screen 116, 118 in accordance with the present invention. FIG. 36 illustrates a possible display on the computer screen 116, 118 of the EDI data after the VIEW EDI DATA dialog box has been selected in the screen display of FIG. 35. FIGS. 37-38 illustrate possible screen displays on the computer screen 116, 118 for selecting tracking criteria. FIG. 39 illustrates a possible screen display on the computer screen 116, 118 of an audit log, with FIGS. 40-41 illustrating possible screen displays on the computer screen 116, 118 for selecting audit log selection criteria.

Referring now to FIG. 2, the preferred process of authentication and non-repudiation of origin in accordance with the presently preferred method of the present invention shall now be described. As shown and preferred in FIG. 2, block 200 represents a typical EDI interchange in accordance with the present invention. Block 202 represents the preferred action of the server at the sender end with respect to this EDI interchange in accordance with the method of the present invention. As shown and preferred, the sender server preferably computes the MD5 for the entire EDI interchange, such as from ISA to the last character of IEA (termed MD5EDIINTERCHANGE). This value is then preferably inserted into a predetermined position in the AUTACK message, such as preferably the second element of segment USY in the AUTACK message. The sender server then preferably computes the MD5 of the AUTACK message, such as preferably from the first character of USH to the first character of UST. The sender server then preferably signs the AUTACK by encrypting the MD5 with the sender's private key. This computed value is then preferably inserted in a predetermined location in the AUTACK, such as preferably as the first element of segment USR in the AUTACK message. Block 204 represents a typical AUTACK message in accordance with the preferred method of the present invention after the sender server has taken the action illustrated in block 202. The AUTACK 204 is then preferably transmitted to the receiver server where the receiver action and verification illustrated in block 206 preferably takes place. If the EDI interchange is encrypted, then the receiver server preferably decrypts it and computes the MD5 of the received EDI interchange. Assuming that non-repudiation of origin is desired or requested, the receiver server then preferably, using the sender's public key, decrypts the contents of the first element of the USR segment in the AUTACK message 204, which is the location where the sender server has inserted the MD5 of the AUTACK. The value thus obtained by the decryption is the MD5 of the AUTACK message, in the above example, from the first

22

character of USH to the first character of UST. The receiver server then preferably computes the MD5 of the AUTACK message and compares the computed MD5 with the value of the MD5 obtained by decrypting the contents of the first element of the USR segment in the AUTACK message. If both values of MD5 are equal, then the receiver server knows that the integrity of the AUTACK is preserved and non-repudiation of origin is established. The receiver server then preferably compares the MD5 of the EDI interchange with the MD5 in the USY segment of the AUTACK message, which is the location where the sender server has inserted the MD5 of the EDI interchange, and, if the two MD5 values are equal, the receiver server knows that the integrity of the EDI interchange is preserved, authenticity is verified, and non-repudiation of origin is established.

Referring now to FIG. 3, the preferred process of non-repudiation of receipt in accordance with the presently preferred method of the present invention shall now be described. As shown and preferred in block 208, the action of the receiver server in verifying the integrity and authenticity of the EDI interchange received is preferably as described above with respect to block 206 of FIG. 2. Thereafter, the receiver server preferably creates a new AUTACK, such as the AUTACK message represented by block 210, and transmits the new AUTACK 210 to the sender server for verification by the original sender server, as represented by block 212. As shown and preferred in FIG. 3, in creating the new AUTACK, the receiver server preferably populates all segments and elements as appropriate, such as all segments and elements up to and inclusive of UST. The receiver server then preferably computes the MD5 of the new AUTACK, such as from USH to the first character of UST, and signs the computed MD5 with the receiver's private key. The receiver server then preferably inserts the digitally signed MD5 into a predetermined location in the new AUTACK, such as the first element of the USR segment. The receiver server then preferably populates the UNT and UNZ segments of the new AUTACK as appropriate and transmits the prepared new AUTACK to the original sender server. The original sender server then preferably verifies the digital signature of the received new AUTACK by decrypting it with the receiver's public key, with the value obtained by this decryption being the MD5 of the received new AUTACK. The original sender server then computes the MD5 of the received new AUTACK and compares it against the value of the MD5 obtained from the decryption process. If the two values of MD5 are the same, then the original sender server knows that the integrity of the new AUTACK is preserved and non-repudiation of origin of the new AUTACK is established. The original sender server also knows that if the MD5 contained in the USY segment of the received new AUTACK in the above example is equal to the MD5 of the EDI interchange previously transmitted and the acknowledgement is positive (such as preferably obtained by testing the security code in the new AUTACK message), then the EDI interchange in question is known to both sender and receiver because the MD5 of the EDI interchange and the interchange number are contained in the AUTACK message and have been duly recognized. In addition, the integrity and authenticity of the EDI interchange upon receipt has been verified and the receiver sender does not deny having received the EDI interchange in question.

Referring now to FIGS. 4-5, a process flow diagram of the presently preferred method of receiving and sending E-mail, respectively, in accordance with the presently preferred method of the present invention is shown. In this

5,812,669

23

regard, TEMPLAR, the controller for carrying out the presently preferred method of the present invention, preferably sits between the conventional mailer and the user specified EDI flat-file on the sending and receiving systems, with the conventional SENDMAIL supplied with the UNIX X-WINDOWS OR MICROSOFT WINDOWS operating system being preferably used to send and receive mail, with the mail which is being sent and received preferably being MIME compliant, and with PKCS being preferably used to encrypt and decrypt MIME encoded body parts. Preferably, the MIME identifiers are not encrypted. As noted above, the EDIFACT AUTACK message is preferably used to deliver secure authentication, non-repudiation of origin and/or receipt, and acknowledgement or denial of acknowledgement for one or more X.12 or EDIFACT envelopes. Preferably, multiple EDI envelopes are viewed as one block of data in the system of the present invention. Preferably, if a received AUTACK message fails message integrity, an acknowledgement of receipt is not sent back to the original sender of the message, although, if desired, the system can be readily modified to accomplish this.

Referring now to FIGS. 6-9, these are process flow diagrams with respect to trading partner management, audit log management, tracking management, and job monitoring, respectively, in accordance with the presently preferred method of the present invention. These diagrams are self explanatory when considered in conjunction with the foregoing discussion and will not be described in any greater detail hereinafter.

FIG. 10 is a functional diagram of the organization of the presently preferred method of the present invention as represented by the script of TABLE A and the foregoing discussion and will not be described in any greater detail hereinafter.

Lastly, FIGS. 11A-13B comprise a process flow diagram of the presently preferred method of the present invention in accordance with the foregoing description, with FIGS. 11A and 11B illustrating various steps of verification of the integrity of the AUTACK, the EDI interchange, and the certificate, with NRO representing non-repudiation of origin and NRR representing non-repudiation of receipt. FIG. 12 illustrates the portion of the method devoted to TPA processing. FIGS. 13A and 13B illustrate the portion of the method of the present invention devoted to processing of the public and private keys, as well as TPA, in carrying out the method of the present invention as described above.

Thus, by utilizing the AUTACK message as a document for the digital signature which is signed based on a public/private key system, such as RSA, an efficient, highly secure mailer for EDI over an open network, such as the INTERNET, is provided in which trading partners may readily obtain secure verification and authentication and non-repudiation of both origin and receipt, all of which are important in fast moving electronic business transactions over a widely dispersed geographic area in which an open network is the most viable communication media.

What is claimed is:

1. In a public key/private key secure communication system for selectively interconnecting a plurality of computers over an open public network, said plurality of computers comprising a sender computer and a recipient computer, said sender and recipient computers exchanging secure digital messages there between, said sender computer having a first associated public key and a first associated private key, said recipient computer having a second associated public key and a second associated private key, said digital messages comprising an EDI interchange communi-

24

cation between said sender computer and said recipient computer, said EDI interchange communication having an associated EDI acknowledgment message; the improvement in said secure open network communication system comprising

means for computing a first hash for said EDI interchange communication from said sender computer;

means for inserting said first hash in a predetermined location in said associated EDI acknowledgment message;

means for computing a second hash of said associated EDI acknowledgment message;

means for digitally signing said associated EDI acknowledgment message, said message digitally signing

means comprising means for encrypting said second hash with said sender computer's private key;

means for inserting said second hash in a predetermined location in said associated EDI acknowledgment message;

means for transmitting said EDI interchange communication along with said digitally signed associated EDI acknowledgment message to said recipient computer over said open public network; and

means associated with said recipient computer for receiving and processing said received EDI interchange communication and said digitally signed EDI acknowledgment message for providing authentication and non-repudiation of said EDI interchange communication from said sender computer, said means comprising means for decrypting said encrypted second hash with said sender computer's public key; whereby secure private EDI interchange communications can occur over said open public network while providing authentication and non-repudiation of said EDI communications.

2. An improved secure open network communication system in accordance with claim 1 wherein said means associated with said recipient computer further comprises means for computing a third hash of said received EDI acknowledgment message; and means for comparing said third hash with said decrypted second hash from said received EDI acknowledgment message, said comparing means comprising means for providing an indication of integrity of said EDI acknowledgment message and non-repudiation of origin when said decrypted second hash and said third hash match.

3. An improved secure open network communication system in accordance with claim 2 wherein said means associated with said recipient computer further comprises means for computing a fourth hash of said received EDI interchange communication; and means for comparing said fourth hash of said received EDI interchange communication with said first hash in said received EDI acknowledgment message, said comparing means comprising means for providing an indication of integrity and verification of authenticity of said EDI interchange communication and non-repudiation of origin when said first and fourth hash match.

4. An improved secure open network communication system in accordance with claim 3 wherein said means associated with said recipient computer further comprises means for creating a reply EDI acknowledgment message and transmitting said reply EDI acknowledgment message to said sender computer over said open public network, said reply EDI acknowledgment message creating means comprising means for computing a fifth hash of said reply EDI

5,812,669

25

acknowledgement message and for digitally signing said fifth hash by encrypting said fifth hash with said recipient computer's private key; and means for inserting said digitally signed fifth hash into a predetermined location in said transmitted reply EDI acknowledgement message.

5. An improved secure open network communication system in accordance with claim 4 further comprising means associated with said sender computer for receiving said transmitted reply EDI acknowledgement message, and for decrypting said encrypted fifth hash with said recipient computer's public key for verifying said digital signature of said reply EDI acknowledgement message; and means for computing a sixth hash of said received reply EDI acknowledgement message; and means for comparing said sixth hash against said decrypted fifth hash, said comparing means comprising means for providing an indication of integrity of said received reply EDI acknowledgement message and non-repudiation of origin of said reply EDI acknowledgement message; whereby non-repudiation of receipt of said EDI interchange communication is established by said sender computer.

6. An improved secure open network communication system in accordance with claim 5 wherein said means for creating said reply EDI acknowledgement message further comprises means for inserting said fourth hash in a predetermined location in said transmitted reply EDI acknowledgement message, and said means associated with said sender computer further comprises means for comparing said fourth hash in said received reply EDI acknowledgement message with said first hash, said comparing means providing an indication of integrity and authenticity of said EDI interchange when said first and fourth hash match.

7. An improved secure open network communication system in accordance with claim 6 wherein said EDI acknowledgement message comprises an AUTACK message.

8. An improved secure open network communication system in accordance with claim 7 wherein said reply EDI acknowledgement message comprises an AUTACK message.

9. An improved secure open network communication system in accordance with claim 8 wherein each of said hashes comprise an MD5.

10. An improved secure open network communication system in accordance with claim 9 wherein said public and private keys comprise an RSA type cryptographic communication system.

11. An improved secure open network communication system in accordance with claim 10 wherein said open public network comprises the Internet.

12. An improved secure open network communication system in accordance with claim 4 wherein said means for creating said reply EDI acknowledgement message further comprises means for inserting said fourth hash in a predetermined location in said transmitted reply EDI acknowledgement message, and said means associated with said sender computer further comprises means for comparing said fourth hash in said received reply EDI acknowledgement message with said first hash, said comparing means providing an indication of integrity and authenticity of said EDI interchange when said first and fourth hash match.

13. An improved secure open network communication system in accordance with claim 1 wherein said open public network comprises the Internet.

14. An improved secure open network communication system in accordance with claim 1 wherein said means associated with said recipient computer further comprises

26

means for creating a reply EDI acknowledgement message and transmitting said reply EDI acknowledgement message to said sender computer over said open public network, said reply EDI acknowledgement message creating means comprising means for computing a third hash of said reply EDI acknowledgement message and for digitally signing said third hash by encrypting said third hash with said recipient computer's private key; and means for inserting said digitally signed third hash into a predetermined location in said transmitted reply EDI acknowledgement message.

15. An improved secure open network communication system in accordance with claim 14 wherein said open public network comprises the Internet.

16. An improved secure open network communication system in accordance with claim 15 further comprising means associated with said sender computer for receiving said transmitted reply EDI acknowledgement message, and for decrypting said encrypted third hash with said recipient computer's public key for verifying said digital signature of said reply EDI acknowledgement message; and means for computing a fourth hash of said received reply EDI acknowledgement message; and means for comparing said fourth hash against said decrypted third hash, said comparing means comprising means for providing an indication of integrity of said received reply EDI acknowledgement message and non-repudiation of origin of said reply EDI acknowledgement message; whereby non-repudiation of receipt of said EDI interchange communication is established by said sender computer.

17. An improved secure open network communication system in accordance with claim 14 further comprising means associated with said sender computer for receiving said transmitted reply EDI acknowledgement message, and for decrypting said encrypted third hash with said recipient computer's public key for verifying said digital signature of said reply EDI acknowledgement message; and means for computing a fourth hash of said received reply EDI acknowledgement message; and means for comparing said fourth hash against said decrypted third hash, said comparing means comprising means for providing an indication of integrity of said received reply EDI acknowledgement message and non-repudiation of origin of said reply EDI acknowledgement message; whereby non-repudiation of receipt of said EDI interchange communication is established by said sender computer.

18. An improved secure open network communication system in accordance with claim 14 wherein said EDI acknowledgement message comprises an AUTACK message.

19. An improved secure open network communication system in accordance with claim 18 wherein said reply EDI acknowledgement message comprises an AUTACK message.

20. An improved secure open network communication system in accordance with claim 14 wherein said reply EDI acknowledgement message comprises an AUTACK message.

21. An improved secure open network communication system in accordance with claim 1 wherein said EDI acknowledgement message comprises an AUTACK message.

22. An improved secure open network communication system in accordance with claim 21 wherein said open public network comprises the Internet.

23. An improved secure open network communication system in accordance with claim 22 wherein each of said hashes comprise an MD5.

5,812,669

27

24. An improved secure open network communication system in accordance with claim 1 wherein each of said hashes comprise an MD5.

25. An improved secure open network communication system in accordance with claim 24 wherein said open public network comprises the Internet.

26. An improved secure open network communication system in accordance with claim 24 where said EDI acknowledgement message comprises an AUTACK message.

27. An improved secure open network communication system in accordance with claim 26 wherein said public and private keys comprise an RSA type cryptographic communication system.

28. An improved secure open network communication system in accordance with claim 27 wherein said open public network comprises the Internet.

29. An improved secure open network communication system in accordance with claim 1 wherein said public and private keys comprise an RSA type cryptographic communication system.

30. An improved secure open network communication system in accordance with claim 29 wherein said open public network comprises the Internet.

31. An improved secure open network communication system in accordance with claim 1 further comprising means for generating a trading partner agreement communication between said sender computer and said recipient computer, said sender computer and said recipient computer comprising trading partners, said trading partner agreement communication comprising said public keys in said EDI interchange communication for enabling said trading partners to provide certification to each other.

32. An improved secure open network communication system in accordance with claim 31 wherein said open public network comprises the Internet.

33. An improved secure open network communication system in accordance with claim 32 wherein said EDI acknowledgement message comprises an AUTACK message.

34. An improved secure open network communication system in accordance with claim 31 wherein said EDI acknowledgement message comprises an AUTACK message.

35. A method for selectively interconnecting a plurality of computers over an open public network for providing a computer exchange of private secure digital messages between a sender computer and a recipient computer in said plurality of computers, said sender computer having a first associated public key and a first associated private key, said recipient computer having a second associated public key and a second associated private key, said digital messages comprising an EDI interchange communication between said sender computer and said recipient computer, said EDI interchange communication having an associated EDI acknowledgment message, said method comprising the steps of digitally signing said associated EDI acknowledgement message with said sender computer's private key; transmitting said EDI interchange communication along with said digitally signed associated EDI acknowledgement message to said recipient computer over said open public network; and processing said received digitally signed EDI acknowledgement message for providing authentication and non-repudiation of said EDI interchange communication from said sender computer, said processing step comprising the step of processing said received digitally signed associated EDI acknowledgement message with said sender's public

28

key; whereby secure private EDI interchange communications can occur over an open public network while providing authentication and non-repudiation of said EDI communications using said associated EDI acknowledgement message.

36. A method for providing secure private communications over an open public network in accordance with claim 35 wherein said open public network comprises the Internet.

37. A method for providing secure private communications over an open public network in accordance with claim 36 further comprising the steps of creating a reply EDI acknowledgement message from said recipient computer; digitally signing said reply EDI acknowledgement message with said recipient computer's private key; transmitting said digitally signed reply EDI acknowledgement message to said sender computer over said open public network, said sender computer receiving said digitally signed reply EDI acknowledgement message; and processing said received digitally signed reply EDI acknowledgement message for providing non-repudiation of receipt of said EDI interchange communication by said sender computer, said processing step comprising the step of processing said received digitally signed reply EDI acknowledgement message with said recipient computer's public key; whereby non-repudiation of receipt of said EDI interchange communication is established by said sender computer.

38. A method for providing secure private communications over an open public network in accordance with claim 35 further comprising the steps of creating a reply EDI acknowledgement message from said recipient computer; digitally signing said reply EDI acknowledgement message with said recipient computer's private key; transmitting said digitally signed reply EDI acknowledgement message to said sender computer over said open public network, said sender computer receiving said digitally signed reply EDI acknowledgement message; and processing said received digitally signed reply EDI acknowledgement message for providing non-repudiation of receipt of said EDI interchange communication by said sender computer, said processing step comprising the step of processing said received digitally signed reply EDI acknowledgement message with said recipient computer's public key; whereby non-repudiation of receipt of said EDI interchange communication is established by said sender computer.

39. A method for providing secure private communications over an open public network in accordance with claim 38 wherein said processing step further comprises the step of providing non-repudiation of origin at said recipient computer from said received EDI acknowledgement message.

40. A method for providing secure private communications over an open public network in accordance with claim 39 wherein said open public network comprises the Internet.

41. A method for providing secure private communications over an open public network in accordance with claim 38 wherein said reply EDI acknowledgement message comprises an AUTACK message.

42. A method for providing secure private communications over an open public network in accordance with claim 41 wherein said EDI acknowledgement message comprises an AUTACK message.

43. A method for providing secure private communications over an open public network in accordance with claim 35 wherein said processing step further comprises the step of providing non-repudiation of origin at said recipient computer from said received EDI acknowledgement message.

44. A method for providing secure private communications over an open public network in accordance with claim

5,812,669

29

35 wherein said EDI acknowledgement message comprises an AUTACK message.

45. A method for providing secure private communications over an open public network in accordance with claim 35 wherein said public and private keys comprise an RSA type cryptographic communication system. 5

46. A method for providing secure private communications over an open public network in accordance with claim 45 wherein said open public network comprises the Internet.

47. A method for providing secure private communications over an open public network in accordance with claim 45 wherein said EDI acknowledgement message comprises an AUTACK message. 10

48. A method for providing secure private communications over an open public network in accordance with claim 47 further comprising the steps of creating a reply EDI acknowledgement message from said recipient computer; digitally signing said reply EDI acknowledgement message with said recipient computer's private key; transmitting said digitally signed reply EDI acknowledgement message to 15

30

said sender computer over said open public network, said sender computer receiving said digitally signed reply EDI acknowledgement message; and processing said received digitally signed reply EDI acknowledgement message for providing non-repudiation of receipt of said EDI interchange communication by said sender computer, said processing step comprising the step of processing said received digitally signed reply EDI acknowledgement message with said recipient computer's public key; whereby non-repudiation of receipt of said EDI interchange communication is established by said sender computer.

49. A method for providing secure private communications over an open public network in accordance with claim 48 wherein said reply EDI acknowledgement message comprises an AUTACK message.

50. A method for providing secure private communications over an open public network in accordance with claim 49 wherein said open public network comprises the Internet.

\* \* \* \* \*